

Product Features

- Certified to EN 1433 Load Class F - 200,000 lbs - 4,182 psi
- Uses 'PowerLok' boltless locking system
- Suitable for use with S100K and H100K channels
- Manufactured from ductile iron to ASTM A 536-84 - Grade 304 65-45-12
- Anti-Shunt lugs



Supplied By:

**TRENCHDRAIN
SUPPLY**

877-903-7246

www.trenchdrainsupply.com

Specifications

General

The surface drainage system shall be ACO PowerDrain or SlabDrain, complete with ACO ductile iron longitudinal grate with 'PowerLok' locking as manufactured by ACO, Inc. or similar approved.

Materials

The covers shall be manufactured from ductile iron and have **minimum** properties as follows:

- **Independently certified to meet Load Class F to EN 1433 - 200,000 lbs - 4,182 psi**
- **Ductile iron to ASTM 536-84 - Grade 65-45-12**
- **Intake area of 154 sq. cm per ½ meter of grate**

The overall width of 5.43" (138mm) and overall length of 19.68" (500mm). Slots measure at a maximum of 1.35" (34mm).

Grate

Grate is longitudinal ductile iron. Ductile iron ASTM 536-84 - Grade 65-45-12. After removal of grates there shall be uninterrupted access to the trench to aid maintenance. Grates can be used for PowerDrain or SlabDrain.

Installation

The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

* delete as appropriate


ACO Specification Information

ACO DRAIN


4" width - ductile iron longitudinal grate



Plan view

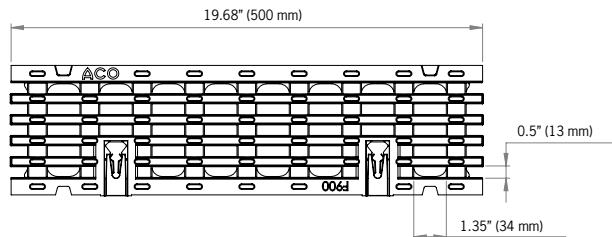


Side elevation



Description	Part No.	Length inches (mm)	Width inches (mm)	Weight lbs.
PowerLok grate SK1 ductile iron longitudinal grate - CI F	96096	19.68 (500)	5.43 (138)	13.6

PowerLok locking mechanism

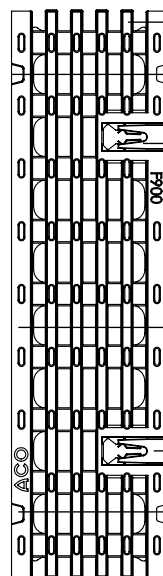

PowerLok Grate
Lug
PowerLok Device
'unlocked' position
PowerLok Rail
PowerLok Device
'locked' position
Recess in Grate
PowerLok Rail

ACO **PowerLok** is a patented boltless locking system. Grates are removed and replaced with minimum time and effort for ease of maintenance.

Lugs on the rail opposite the **PowerLok** device slots into recesses in the grate. The **PowerLok** device is used to engage the lug on the rail at two locations per grate to 'lock' the grate to the channel.

Supplied By:

TRENCH DRAIN
SUPPLY
877-903-7246
www.trenchdrainsupply.com

ACO, Inc.
Northeast Sales Office
9470 Pinecone Drive
Mentor, Ohio 44060
Tel: (440) 639-7230
Toll free: (800) 543-4764
Fax: (440) 639-7235

West Sales Office
825 W. Beechcraft St.
Casa Grande, AZ 85122
Tel: (520) 421-9988
Toll Free: (888) 490-9552
Fax: (520) 421-9899

Southeast Sales Office
4211 Pleasant Road
Fort Mill, SC 29708
Toll free: (800) 543-4764
Fax: (803) 802-1063

Follow us on



Electronic Contact:
info@ACODrain.us
www.ACODrain.us

SPEC INFO
ACO

© April 2018, ACO, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO, Inc. reserves the right to change the product and specifications without notice.

April 2018

www.ACODrain.us