


**Type 411Q/413Q Perforated galvanized steel grate**

**Product Features**

- Certified to EN 1433 Load Class C - 56,000 lbs - 1,162 psi
- Uses 'QuickLok' boltless locking system
- Suitable for use with K100, KS100, C100, H100-8, H100-10, and H100K-8 channels
- Manufactured from 16 gauge galvanized steel
- Patented reinforcement underneath designed to prevent bowing and collapse
- Complies with ADA - American Disabilities Act of 1990 Section 4.5.4
- Complies with ASME: A112.6.3 - 2001: Section 7.12 Heel Resistant Strainers and Grates
- Bicycle Tire Penetration Resistant to AS3996-2006

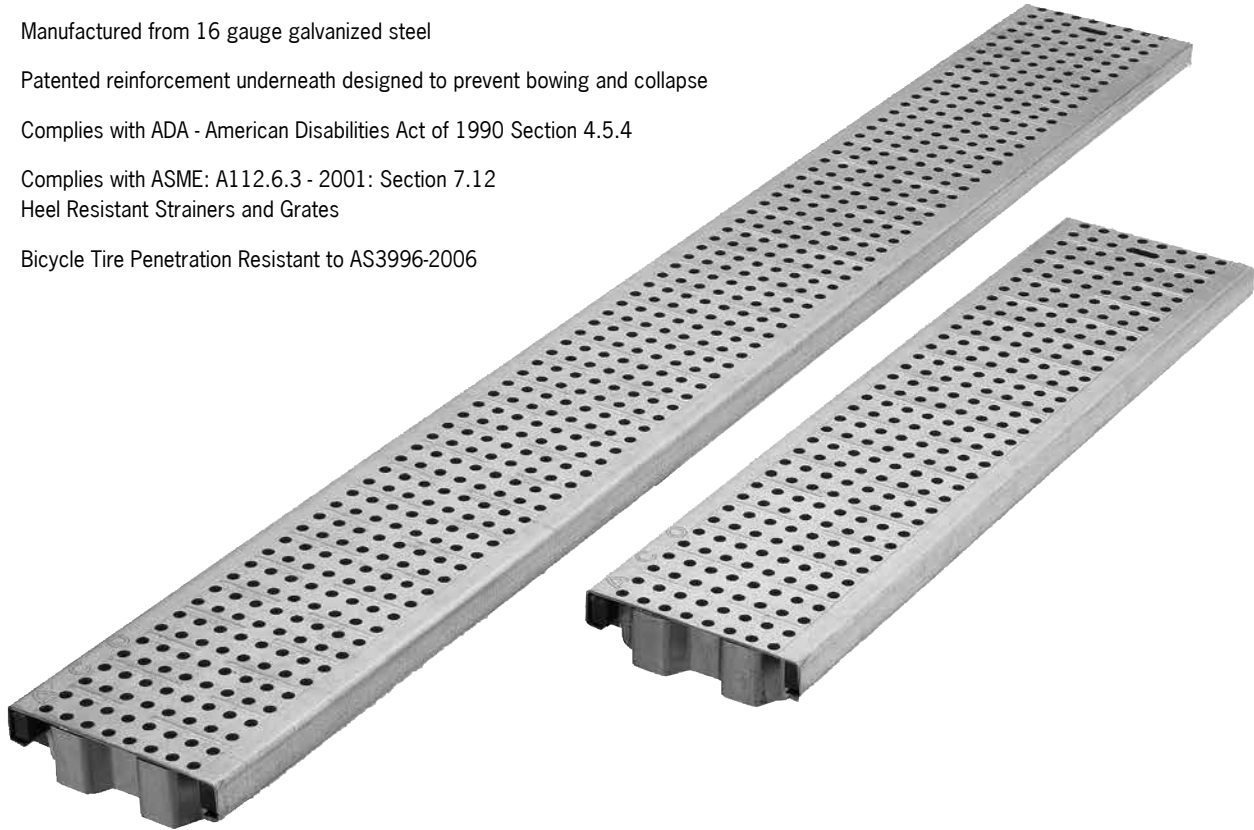

ACO Specification Information

**Specifications**

**General**

The surface drainage system shall be ACO Drain K100, KS100, C100, H100-8, H100-10, and H100K-8 channels\* complete with ACO Type 411Q/413Q Perforated galvanized steel grate with 'QuickLok' locking as manufactured by ACO Polymer Products, Inc. or similar approved.

**Materials**

The covers shall be manufactured from galvanized steel and have **minimum** properties as follows:-

- **Independently certified to meet Load Class C to EN 1433 - 56,000 lbs - 1,162 psi**
- **16 gauge galvanized steel**
- **Intake area of 14.1 sq. in. (91.0 cm<sup>2</sup>) per half meter of grate**

The overall width of 4.84" (123mm) and overall length of 39.37" (1000mm) (Type 411) and 19.69" (500mm) (Type 413). Perforations measure 0.25" (6.35mm) in diameter.

**Installation**

The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

\* delete as appropriate

Supplied By:



877-903-7246

www.trenchdrainsupply.com




**ACO DRAIN**


**Type 411Q/413Q Perforated galvanized steel grate**



**Plan view**

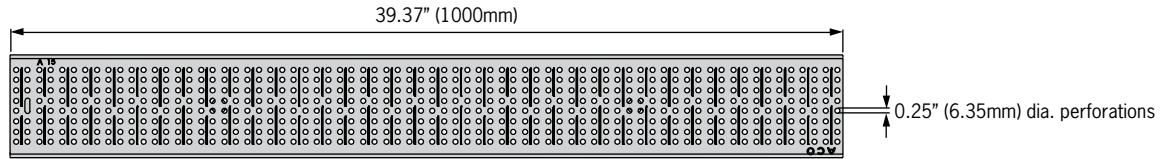


**Side elevation**

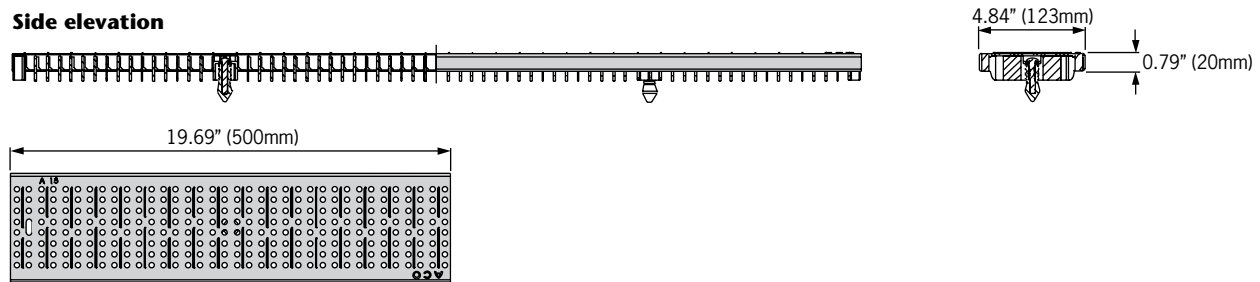

Description	Part No.	Length inches (mm)	Width inches (mm)	Weight lbs.
<b>QuickLok grate</b>				
Type 411Q Perforated galvanized grate	<b>98905</b>	39.37 (1000)	4.84 (123)	11.3
Type 413Q Perforated galvanized grate	<b>98918</b>	19.69 (500)	4.84 (123)	5.7
QuickLok locking bar	<b>02899</b>	-	-	0.2
QuickLok grate removal hook	<b>01318</b>	-	-	0.6

**'QuickLok' locking mechanism**

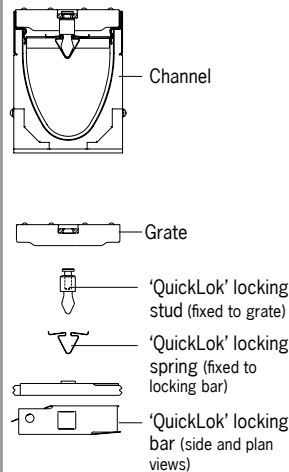

ACO 'QuickLok' is a patented boltless locking system, grates are removed and replaced with the minimum time and effort for ease of maintenance. The unique design provides a positive 'snap down' fit into the locking bar. A stud is fixed to the grate which 'locks' into the spring clip in the locking bar.

The 'QuickLok' stud is made from stainless steel and high density nylon, the locking bar and clip are stainless steel, for use in both general purpose and corrosive environments.

Supplied By:

**TRENCH DRAIN SUPPLY**  
 877-903-7246  
 www.trenchdrainsupply.com

**ACO Polymer Products, Inc.**

**Northeast Sales Office**

P.O. Box 245  
 Chardon, OH 44024  
 Tel: (440) 285-7000  
 Toll free: (800) 543-4764  
 Fax: (440) 285-7005

**West Sales Office**

P.O. Box 12067  
 Casa Grande, AZ 85130  
 Tel: (520) 421-9988  
 Toll Free: (888) 490-9552  
 Fax: (520) 421-9899

**Southeast Sales Office**

4211 Pleasant Road  
 Fort Mill, SC 29708  
 Toll free: (800) 543-4764  
 Fax: (803) 802-1063

**Follow us on**



**Electronic Contact:**

info@ACODrain.us  
 www.ACODrain.us



© April 10, 2013 ACO Polymer Products, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO Polymer Products Inc. reserves the right to change the product and specifications without notice.