




H100KS-8

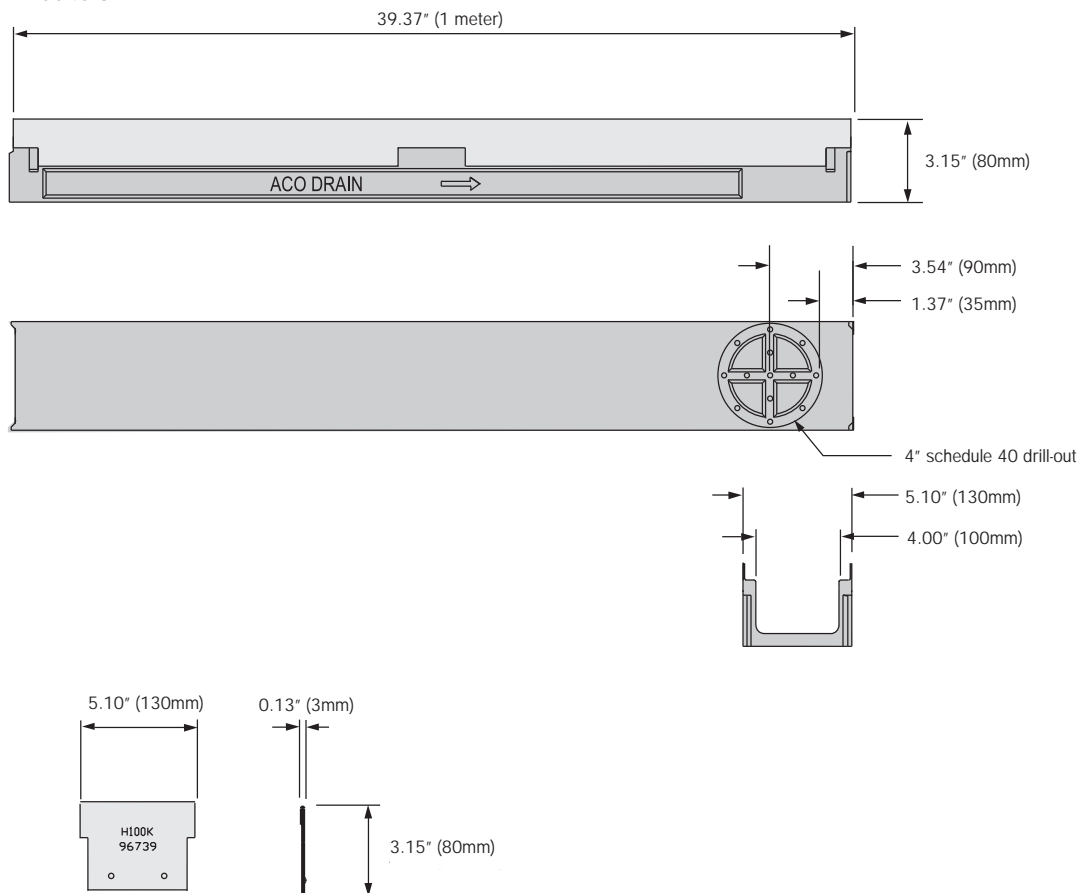

## Outlet flow rates

Product	Outlet size (Sch. 40)	Invert Depth	GPM	CFS
H100KS-8 channel	4" round	2.56	87	0.20

Note: These are the pipe flow rates at the specified outlet, NOT channel flow rates.

Supplied By:

**TRENCHDRAIN  
SUPPLY**

877-903-7246

www.trenchdrainsupply.com

**ACO DRAIN****SlabDrain - H100KS-8 stainless steel edge rail channel system**

Description	Part No.	Invert Depth inches      mm		Weight lbs.
<b>H100KS-8 - Polyester polymer concrete</b> H100KS-8 Neutral channel - 39.37" (1m)	95373	2.56	65	16.0
H100KS-8 Stainless steel closing cap	98471	2.56	65	1.0

**Notes:**

1. Add nominal 0.6" (15mm) to invert depth for overall channel depth
2. Preformed Sch. 40 4" dia. drill-out cast on underside of each channel
3. Use QuickLok/PowerLok grate removal tool to remove grates (Part # 01318)
4. H80KS has Grade 304 stainless steel rails

**Specifications****General**

The surface drainage system shall be ACO Drain SlabDrain H100KS-8 complete with gratings secured with 'QuickLok' as manufactured by ACO Polymer Products, Inc. or equal approved.

**Materials**

The trench system bodies shall be manufactured from polyester polymer concrete with minimum properties as follows:

Compressive strength: 14,000 psi  
 Flexural strength: 4,000 psi  
 Water absorption 0.07%  
 Frost proof  
 Salt proof  
 Dilute acid and alkali resistant

The nominal clear opening shall be 4.00" (100mm) with overall width of 5.10" (130mm). Pre-cast units shall be manufactured with neutral invert and have a wall thickness of at least 0.5" (13mm). Each unit will feature a male to female interconnecting end profile. Units shall have horizontal cast in anchoring features on the outside wall to ensure maximum mechanical bond to the surrounding bedding material and pavement surface. The Grade 304 stainless steel rail will be integrally cast in by the manufacturer to ensure maximum homogeneity between polymer concrete body and edge rail. Each edge rail shall be at least 1/8" (3mm) thick.

**Grates**

Grates should be specified. See separate ACO Spec Info grate sheets for details. After removal of grates and 'QuickLok' bar there shall be uninterrupted access to the trench to aid maintenance.

**Installation**

The trench drain system shall be installed in accordance with the manufacturer's installation instructions and recommendations.

Supplied By:

**TRENCHDRAIN**  
**SUPPLY**  
**877-903-7246**  
**www.trenchdrainsupply.com**

**ACO Polymer Products, Inc.****Northeast Sales Office**

P.O. Box 245  
 Chardon, OH 44024  
 Tel: (440) 285-7000  
 Toll free: (800) 543-4764  
 Fax: (440) 285-7005

**West Sales Office**

P.O. Box 12067  
 Casa Grande, AZ 85130  
 Tel: (520) 421-9988  
 Toll Free: (888) 490-9552  
 Fax: (520) 421-9899

**Southeast Sales Office**

4211 Pleasant Road  
 Fort Mill, SC 29708  
 Toll free: (800) 543-4764  
 Fax: (803) 802-1063

**Follow us on****Electronic Contact:**

info@ACODrain.us  
 www.ACODrain.us

**SPEC INFO**  
**ACO**

© February 13, 2013 ACO Polymer Products, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO Polymer Products Inc. reserves the right to change the product and specifications without notice.