


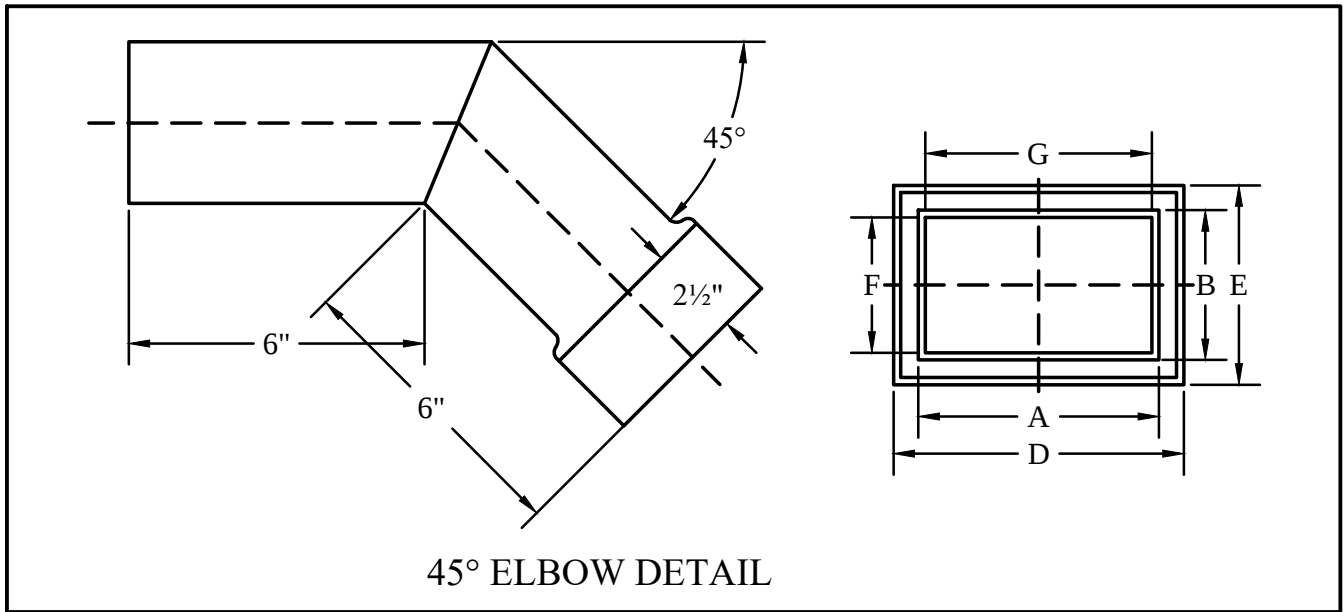

PRODUCT SPECIFICATION - 45° ELBOW

PRODUCT LIST

PRODUCT DIMENSIONS

MODEL	DIMENSIONS	ROUND EQUIV.	ROUND TRANSVERSE AREA. (SQ. IN.)	A	B	C	D	E	F	G	
CP-SP455	3"x5"	4"	12.724	5.269"	3.269"	10 GA.	5.5"	3.5"	3"	5"	
CP-SP458	3"x8"	5"	20.040	8.269"	3.269"	10 GA.	8.5"	3.5"	3"	8"	
CP-SP4512	3"x12"	6"	28.886	12.269"	3.269"	10 GA.	12.5"	3.5"	3"	12"	
CP-SP4517	3"x17"	8"	50.014	17.269"	3.269"	10 GA.	17.50"	3.5"	3"	17"	
CP-SP4514	4"x14"	8"	50.014	14.269"	4.269"	10 GA.	14.50"	4.5"	4"	14"	
CP-SP4527	3"x27"	10"	78.814	27.269"	3.269"	10 GA.	27.50"	3.5"	3"	27"	
CP-SP4522	4"x22"	10"	78.814	22.269	4.269"	10 GA.	22.50"	4.5"	4"	22"	


MATERIAL: 10 GAUGE GALVANIZED A653 G90 MEETS ASTM A-653. TENSILE STRENGTH 50,000.0 YIELD 36,000.

ALL WELDS WILL BE SPRAYED, ROLLED OR BRUSHED WITH GALVANIZED #90 COATING.

RECTANGULAR CONNECTION: MASTIC, CAULKING, EPOXY BINDING OR OTHER APPROVED METHOD.

ROUND CONNECTION: CAST IRON/PLASTIC PIPE CONNECTION USE CAST IRON OR PLASTIC TO STEEL COUPLINGS.

REV	ZONE	DATE	REVISION DESCRIPTION	BY	CK'D

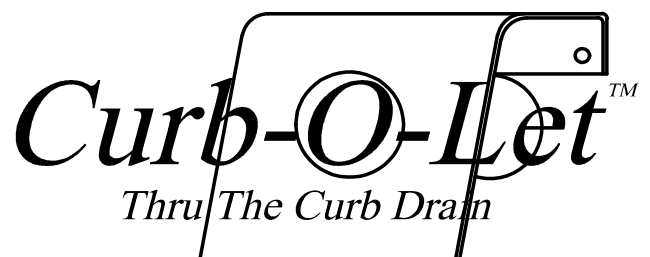

RECTANGULAR STEEL PIPE AND FITTINGS.
45° ELBOW

Supplied By:
**TRENCHDRAIN
SUPPLY**

877-903-7246
www.trenchdrainsupply.com