


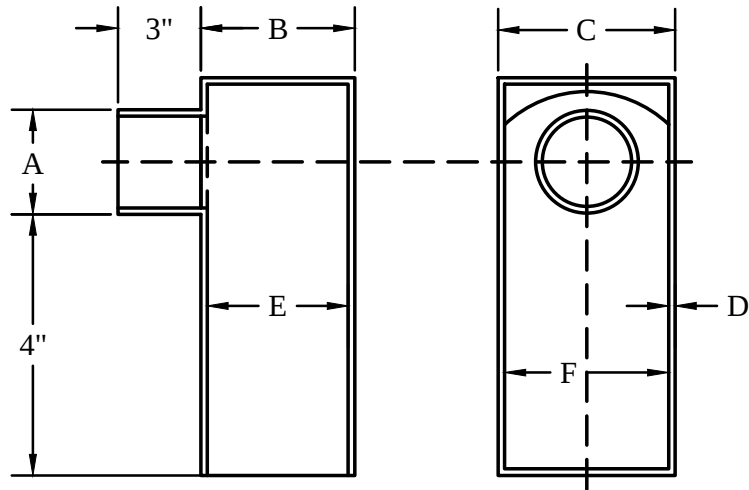

90° ADAPTER DETAIL

PRODUCT SPECIFICATION - 90° ADAPTER

PRODUCT LIST

PRODUCT DIMENSIONS

MODEL	DIMENSIONS	ROUND EQUIV.	ROUND TRANSVERSE AREA. (SQ. IN.)	A	B	C	D	E	F	
CP-SP905	3"x5"x9"	4"	12.724	4.5"	3.269"	5.269"	10 GA.	3"	5"	
CP-SP908	3"x8"x10"	5"	20.040	5.563"	3.269"	8.269"	10 GA.	3"	8"	
CP-SP912	3"x12"x11"	6"	28.886	6.625"	3.269"	12.269"	10 GA.	3"	12"	
CP-SP917	3"x17"x13"	8"	50.014	8.625"	4.269"	17.269"	10 GA.	3"	17"	
CP-SP914	4"x14"x13"	8"	50.014	8.625"	3.269"	14.269"	10 GA.	4"	14"	
CP-SP927	3"x27"x13"	10"	78.814	10.625"	3.269"	27.269"	10 GA.	3"	27"	
CP-SP922	4"x22"x13"	10"	78.814	10.625"	4.269"	22.269"	10 GA.	4"	22"	


MATERIAL: 10 GAUGE GALVANIZED A653 G90 MEETS ASTM A-653. TENSILE STRENGTH 50,000.0 YIELD 36,000.

ALL WELDS WILL BE SPRAYED, ROLLED OR BRUSHED WITH GALVANIZED #90 COATING.

RECTANGULAR CONNECTION: MASTIC, CAULKING, EPOXY BINDING OR OTHER APPROVED METHOD.

ROUND CONNECTION: CAST IRON/PLASTIC PIPE CONNECTION USE CAST IRON OR PLASTIC TO STEEL COUPLINGS.

REV	ZONE	DATE	REVISION DESCRIPTION	BY	CK'D

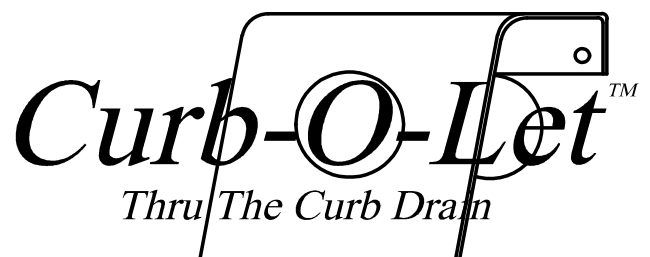

RECTANGULAR STEEL PIPE AND FITTINGS.
90° ADAPTER

Supplied By:

TRENCHDRAIN
SUPPLY

877-903-7246

www.trenchdrainsupply.com