TRENCH DRAIN GRATE



FastTrack[™]

SPECIFICATION

Sioux Chief 865 Series galvanized steel perforated grating shall be used where necessary with FastTrack trench drain channels. Grating shall be corrosion resistant and approved for use in high-traffic, light-duty areas for pedestrian, bicycle and two-wheeled hand cart applications. Fasten grate to anchors with screws.

ADA: Yes Heel-Proof: Yes* Load Rating:

> DIN EN 1433: Class A15 ASME A112.6.3: Light Duty

MATERIALS

Grate: Galvanized (G90) steel - 14 gauge

Screws: Stainless steel

FREE-AREA

37.0 in²

DIMENSIONS

A: Length	36'
B: Width	6"
C: Thickness	3/4"
D: Pattern length	43/4
E: Pattern width	11/2
F: hole diameter	1/4"


^{*} Per ASME A112.6.3 requirements



Supplied By:

TRENCHORAIN
SUPPLY
877-903-7246

www.trenchdrainsupply.com

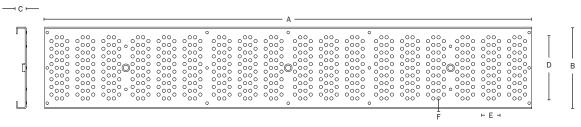

Item Number

865-GGD

