

Number Hydroline Aluminum	Series Hydroline Trench Drain Channel
--	---

Product Specifications

Part No.:
865-HLP4N00F3M


Load Class:
F900 (198,000 lbs) according EN 1433
Certified by MPA-HB (independent laboratories)

Material: Aluminum **Coating:** RAL 9005 -deep black-

Length: 118.1" (3 m) **Weight:** 5.5 lbs (12.6 kg)

Surface:
Slot size (0.47")
Slots according ADA Standards

Use:
HydroLine is perfect for drainage or evaporation of storm water. Low profile (1.18") design is well suited to parking garages, balconies, rooftops or other areas having a low installation depth. Approved for liquid effluent temperatures up to 200 degrees F.

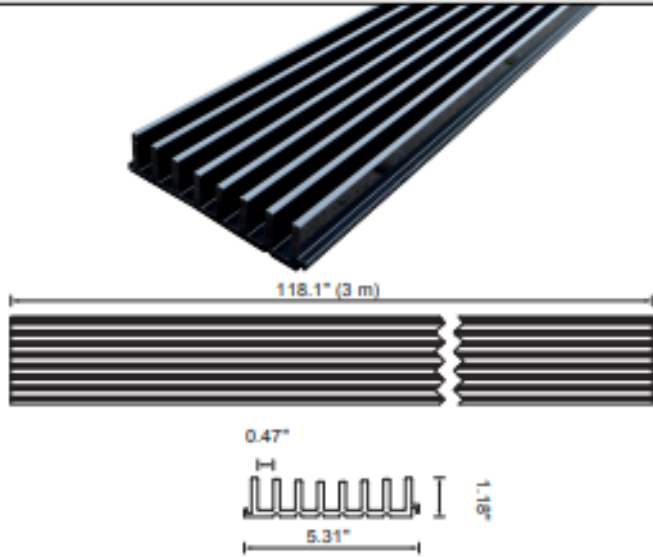

System Specification

Channel Section: 865-HLP4N00F3M
The channel is made of special alloyed, high-grade aluminum certified to EN 1433 Load Class F900 and is qualified as TYPE I.


Outlet Section: 865-HLP4B
The outlet (4") is made of stainless steel. Two locking bars fix the cover to the outlet section. They are unlocked by the grate locking tool (Part No: 865-TOOLM).

Corner Element: 865-HLP4C
The corner piece ensures water flow around a 90° corner.

Connection Piece: 865-HLPCE
The connection piece is used to connect the channel sections.

Installation Chair: 865-HLPPED
The adjustable installation chair levels the channel to a specific height. Standard design is adjustable for installation depths up to 12".

End Piece: 865-HLPEC
The end piece closes the channel run at both ends.

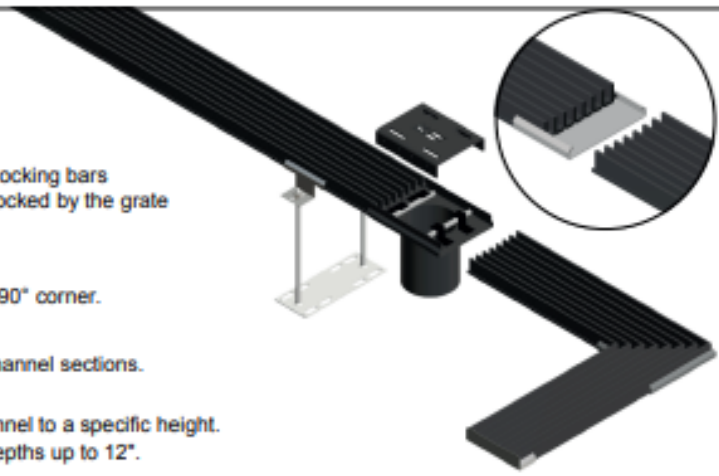

Manufacturer



Specification

HYDROTEC HYDROLINE ALUMINUM DRAINAGE CHANNEL. WITH SLOPE , SUPPLIED BY TRENCH DRAIN SUPPLY.

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.