1-877-903-7246



www.trenchdrainsupply.com

Number	S	Series TOP100				
TOP 100 Channel			Trench Drain Channel			
			TOP 100			
		Inlet	Outlet	Length		Weight
	Slope/Section	(inch)	(inch)	(inch)	Item No.	(lbs)
	Basic Section	4.33	4.33	39.36	865-T4N00	61.73
	1	4.33	4.53	39.36	865-T4S01	61.73
	2	4.53	4.72	39.36	865-T4S02	63.49
	3	4.72	4.92	39.36	865-T4S03	65.26
	4	4.92	5.12	39.36	865-T4S04	67.02
	5	5.12	5.31	39.36	865-T4S05	68.78
TOP 100 Presloped	6	5.31	5.51	39.36	865-T4S06	70.55
101 100 I testopeu	7	5.51	5.71	39.36	865-T4S07	72.31
	8	5.71	5.91	39.36	865-T4S08	74.07
	9	5.91	6.1	39.36	865-T4S09	75.84
6.22"	10	6.1	6.3	39.36	865-T4S10	77.6
3.94"	Basic Section	6.3	6.3	39.36	865-T4N10	66.14
Ŧ	Basic Section	6.3	6.3	19.69	865-T4N105	34.17
	Bottom Outlet	6.3	6.3	39.36	865-T4N10B	83.93
	Side Outlet	6.3	6.3	19.69	865-T4N105S	31.97
	11	6.3	6.5	39.36	865-T4S11	79.37
(O) (I)	12	6.5	6.69	39.36	865-T4S12	81.13
	13	6.69	6.89	39.36	865-T4S13	82.89
	14	6.89	7.09	39.36	865-T4S14	84.66
	15	7.09	7.28	39.36	865-T4S15	86.42
	Basic Section	7.28	7.28	39.36	865-T4N15	78.26
- 6.38"	Basic Section	7.28	7.28	19.69	865-T4N155	39.66
	Bottom Outlet	7.28	7.28	39.36	865-T4N15B	76.06
	Side Outlet	7.28	7.28	19.69	865-T4N155S	37.48
male end (O) female end(I)						
Manufacturer	Specification					
HYDROTEC [®]	HYDROTEC TOP 100 SERIES FIBER REINFORCED CONCRETE WITH A GALVANIZED STEEL EDGE 4" WIDTH DRAINAGE CHAN- NEL. WITH SLOPE , SUPPLIED BY TRENCH DRAIN SUPPLY.					

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTIBILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.


1-877-903-7246



www.trenchdrainsupply.com

Weight

(lbs)

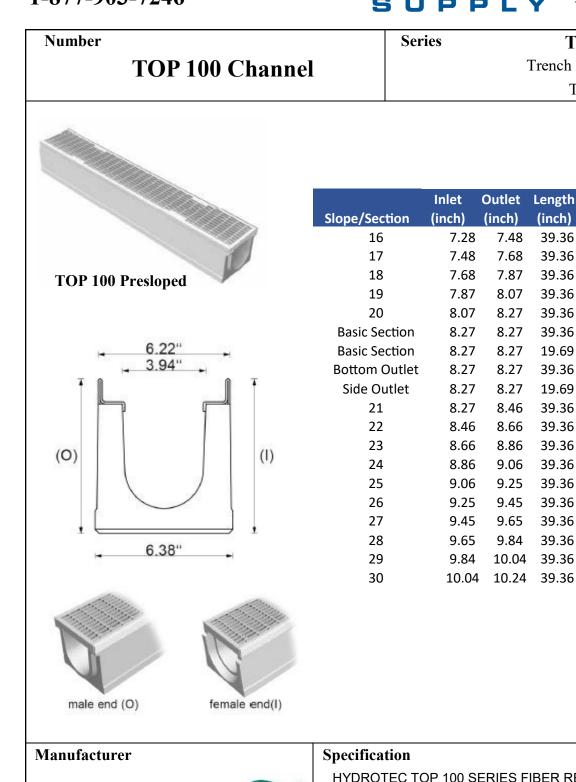

Trench Drain Channel **TOP 100**

Item No.

TOP100

16	7.28	7.48	39.36	865-T4S16	88.18
17	7.48	7.68	39.36	865-T4S17	89.95
18	7.68	7.87	39.36	865-T4S18	91.71
19	7.87	8.07	39.36	865-T4S19	93.48
20	8.07	8.27	39.36	865-T4S20	95.24
c Section	8.27	8.27	39.36	865-T4N20	91.49
c Section	8.27	8.27	19.69	865-T4N205	46.3
om Outlet	8.27	8.27	39.36	865-T4N20B	89.29
e Outlet	8.27	8.27	19.69	865-T4N205S	44.09
21	8.27	8.46	39.36	865-T4S21	97
22	8.46	8.66	39.36	865-T4S22	98.77
23	8.66	8.86	39.36	865-T4S23	100.53
24	8.86	9.06	39.36	865-T4S24	102.29
25	9.06	9.25	39.36	865-T4S25	104.06
26	9.25	9.45	39.36	865-T4S26	105.82
27	9.45	9.65	39.36	865-T4S27	107.58
28	9.65	9.84	39.36	865-T4S28	109.35
29	9.84	10.04	39.36	865-T4S29	111.11
30	10.04	10.24	39.36	865-T4S30	112.88



HYDROTEC TOP 100 SERIES FIBER REINFORCED CONCRETE WITH A GALVANIZED STEEL EDGE 4" WIDTH DRAINAGE CHAN-NEL. WITH SLOPE, SUPPLIED BY TRENCH DRAIN SUPPLY.

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTIBILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.