1-877-903-7246



www.trenchdrainsupply.com

Number

TOP 100 A Class Galvanized

Series

TOP100

Trench Drain Grate TOP 100

Product Specifications

Part No.:

865-T4GSAP (1 m) | 865-T4GSA5P (1/2 m)

Load Class:

A15 (33,000 lbs) according EN 1433 Certified by MPA-HB (independent laboratories)

Material:

Galvanzied Steel Weight:

4.0 lbs (1.8 kg)

Surface:

Round Perforation (0.23")


Locking: Water intake:

Patented boltless 30.70 sq/in (198 cm²/m)

grate locking system

Use:

This grate is developed for use with HydroTec TOP 100 channels made of fiber reinforced concrete with a galvanized steel edge protection.

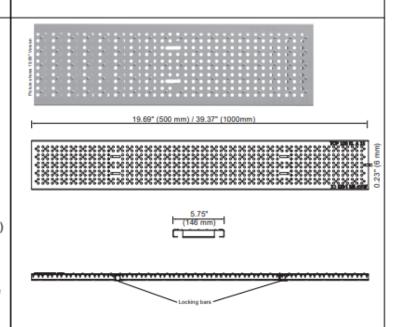

System Specifications

Grate Locking Tool (Part No. 865-TOOL):

The Grate Locking Tool is made of galvanized steel. It's used to lock and unlock the grate.

Grate

The grate is made of galvanized steel and certified to EN 1433 Load Class A15.

Locking Bar (Part No. 865-4LR):

Two locking bars fix the grate to the channel body. They're unlocked by the Grate Locking Tool .

TOP 100 Channel:

The channel body is made of fiber reinforced concrete with a ductile iron edge protection. Connecting profiles at the end of the channel guarantee an easy and fast installation.



Manufacturer



Specification

HYDROTEC TOP 100 SERIES FIBER REINFORCED CONCRETE WITH A GALVANIZED STEEL EDGE 4" WIDTH DRAINAGE CHANNEL. WITH SLOPE, SUPPLIED BY TRENCH DRAIN SUPPLY.

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTIBILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.