

<b>Number</b>  <b>TOP 100 C Class Mesh</b>	<b>Series</b>  <b>TOP100</b> Trench Drain Channel TOP 100
--	---

**Product Specifications**

**Part No.:**  
 865-T4GSCM (1 m) | 865-T4GS5CM (1/2 m)


**Load Class:**  
 C250 (55100 lbs) according EN 1433  
 Certified by MPA-HB (independent laboratories)

**Material:** Galvanized Steel ST-37      **Weight:** 9.47 lbs (4.3kg)

**Surface:**  
 Slot design (0.39" x 1.18")  
 Slots according ADA Standards

**Locking:** Patented boltless grate locking system      **Water intake:** 139.5 sq/in (900 cm<sup>2</sup>/m)

**Use:**  
 This grate is developed for use with HydroTec TOP 100 channels made of fiber reinforced concrete with a galvanized steel edge protection.

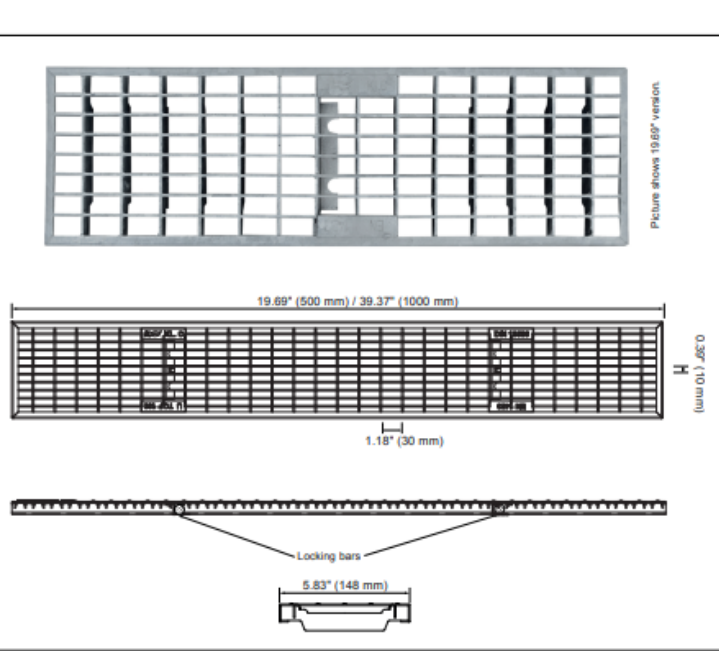


**System Specifications**

**Grate Locking Tool (Part No. 865-TOOL):**  
 The Grate Locking Tool is made of galvanized steel. It's used to lock and unlock the grate.

**Grate:**  
 The grate is made of galvanized steel and certified to EN 1433 Load Class C250.

**Locking Bar (Part No. 865-4LR):**  
 Two locking bars fix the grate to the channel body. They're unlocked by the Grate Locking Tool .

**TOP 100 Channel:**  
 The channel body is made of fiber reinforced concrete with a ductile iron edge protection. Connecting profiles at the end of the channel guarantee an easy and fast installation.

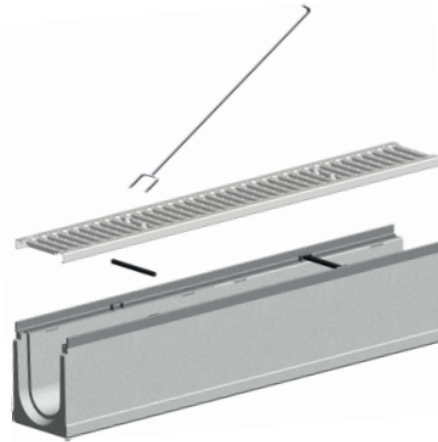

**Manufacturer**



**Specification**

HYDROTEC TOP 100 SERIES FIBER REINFORCED CONCRETE WITH A GALVANIZED STEEL EDGE 4" WIDTH DRAINAGE CHANNEL. WITH SLOPE , SUPPLIED BY TRENCH DRAIN SUPPLY.

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.