


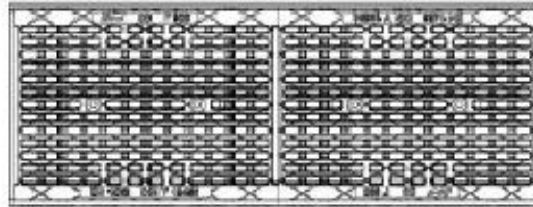


<b>Number</b> <b>MAXI 300 Channel</b>	<b>Series</b> <b>MAX300</b> Trench Drain Channel MAXI 300
--	--

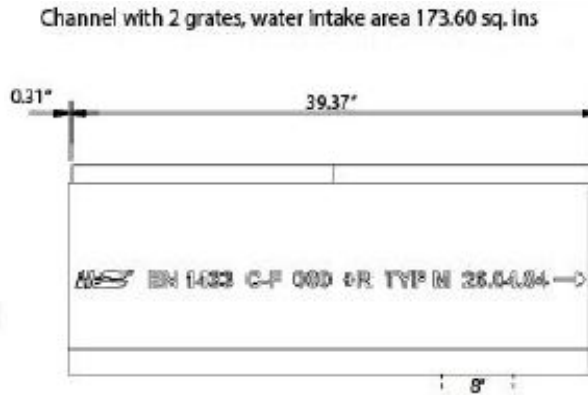

**MAXI 300**

Product Description	With Ductile Iron Class E Grate Part No.	Weight Lbs	With Ductile Iron ADA Class F Grate Part No.	Weight Lbs	'A' Shallow Invert Inches [mm]	'B' Shallow Invert Inches [mm]
Neutral Channel 39.37" (1m)	CHG66350-0501	396.83	CHG66360-0501	436.51	15.75"[400]	15.75"[400]
Neutral Channel 19.69" (0.5m)	CHG66350-0551	198.41	CHG66360-0551	202.82	15.75"[400]	15.75"[400]
Catch Basin 19.69" (0.5m)	CHG66350-0081	306.44	CHG66360-0081	306.44	29.53"[750]	29.53"[750]
Neutral Channel 39.37" (1m) with Precast Outlet Underneath	CHG66350-0571	396.83	CHG66360-0571	436.51	15.75"[400]	15.75"[400]

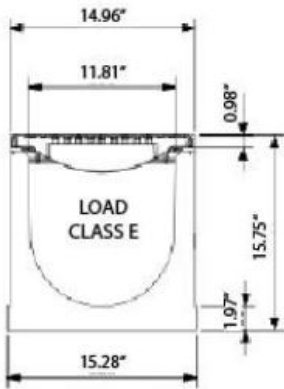

**Manufacturer**



**Specification**

HYDROTEC MAXI 300 SERIES FIBER REINFORCED CONCRETE WITH A DUCTILE IRON EDGE 12" WIDTH DRAINAGE CHANNEL. WITH SLOPE , SUPPLIED BY TRENCH DRAIN SUPPLY.

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.