



<p><b>Number</b> <b>MAXI 300 E Class Grate</b></p>	<p><b>Series</b> <b>MAX300</b> Trench Drain Grate MAXI 300</p>
--	--

**MAXI300 with Ductile Iron ADA Load Class E (Part No. CHG66350-\*) and ADA Load Class F (Part No. CHG66360-\*)**

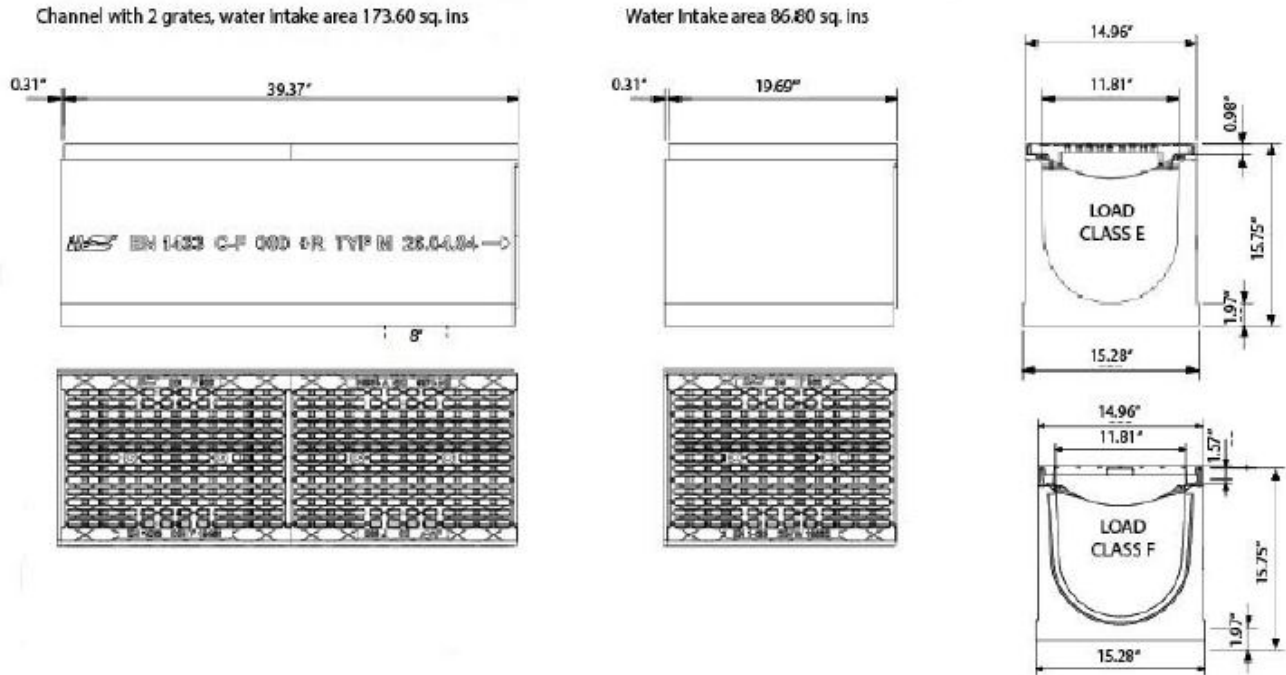

MAXI 11.81" [300] wide throat **Ductile Iron ADA Grate** is rated class E per the DIN EN1433 top load classifications. Ductile Iron conforms to ASTM specification A536-84, Grade 80-55-06. Supplied in 39.37" [1000] or 19.69" [500] nominal lengths with 1.02/0.47 [26/12] wide slots. Grate has an open area of 52.91 sq. in per ft. [112,000 sq.mm per meter].

<p><b>Manufacturer</b></p> 	<p><b>Specification</b></p> <p>HYDROTEC MAXI 300 SERIES FIBER REINFORCED CONCRETE WITH A DUCTILE IRON EDGE 12" WIDTH DRAINAGE CHANNEL. WITH SLOPE , SUPPLIED BY TRENCH DRAIN SUPPLY.</p>
--	--

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.