


<p>Number TOP 100 C Class Ductile Iron</p>	<p>Series TOP100 Trench Drain Grate TOP 100</p>
--	---


TOP 100 - C250

* with vertical outlet DN 100

Water way 564 cm²/m, drainage channel with 2 ductile iron gratings

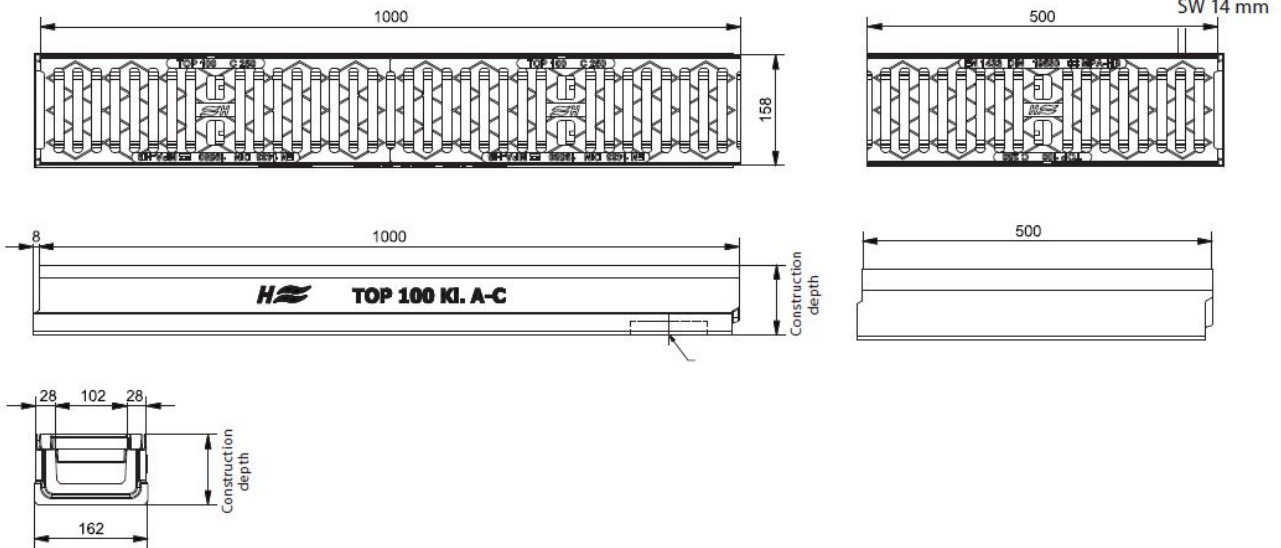

TOP 3.94" [100] throat **Ductile Iron Grate** is rated **class C** per the DIN EN1433 top load classifications. Ductile Iron conforms to ASTM specification A536-84, Grade 80-55-06. Supplied in 39.37" [1000] or 19.69" [500] nominal lengths with 4.72/0.55 [120/14] wide slots. Grate has an open area of 26.64 sq. in per ft. [56,395 sq.mm per meter].

<p>Manufacturer</p> 	<p>Specification</p> <p>HYDROTEC TOP 100 SERIES FIBER REINFORCED CONCRETE WITH A GALVANIZED STEEL EDGE 4" WIDTH DRAINAGE CHANNEL. WITH SLOPE , SUPPLIED BY TRENCH DRAIN SUPPLY.</p>
--	--

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.