




Number 100C HD Channel	Series CPS100HD Trench Drain Channel with DI Frame Pro Plus 100
---	--

100C HD Flat Channel with DI Frame (Standard)




100-C HD Flat




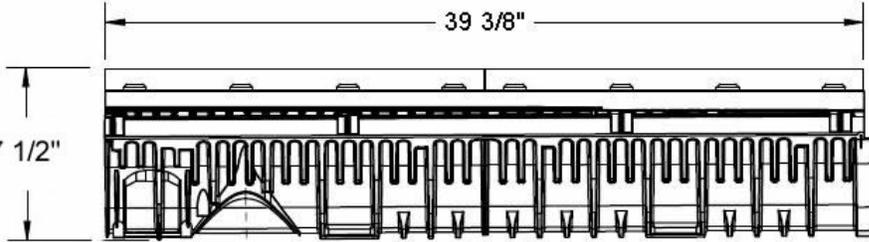


100C HD Presloped Channel with DI Frame (Preslope Upgrade)




100-C HD Presloped



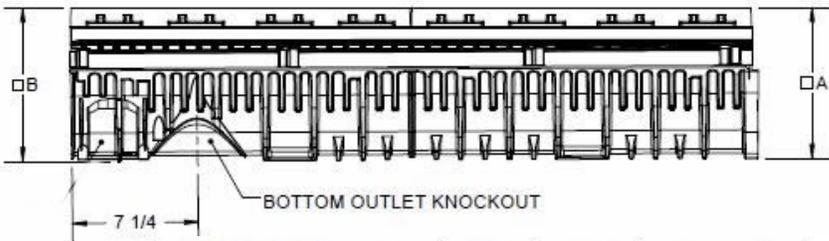

CHANNEL NUMBER + 152431	DIM "A"	DIM "B"	WEIGHT (LBS)
100C	7.4	7.4	25.1
100C01	8.7	8.9	28.3
100C02	8.9	9.1	28.5
100C03	9.1	9.3	28.7
100C04	9.3	9.5	28.8
100C05	9.5	9.7	29.0
100C05N	9.7	9.7	29.2
100C06	9.7	9.9	29.3
100C07	9.9	10.1	29.5
100C08	10.1	10.3	29.7
100C09	10.3	10.5	29.9
100C10	10.5	10.7	30.1
100C11	10.7	10.9	33.0
100C12	10.9	11.1	33.2
100C13	11.1	11.3	30.4
100C14	11.3	11.5	30.5
100C15	11.5	11.7	30.7
100C15N	11.7	11.7	30.9
100C16	11.7	11.9	31.0
100C17	11.9	12.1	31.2
100C18	12.1	12.3	31.4
100C19	12.3	12.5	31.6
100C20	12.5	12.7	31.8

<p>Manufacturer</p> 	<p>Specification</p> <p>JOSAM 100C SERIES CHANNELS WITH DUCTILE IRON RAIL SHALL BE 39.4" LONG WITH 4" INTERNAL WIDTH AND RADIUS BOTTOM. INTERCONNECTING CHANNEL SECTIONS SHALL BE MADE OF SMC/GRP (SHEET MOLDING COMPOUND / GLASS REINFORCED POLYESTER) MATERIAL AND AVAILABLE WITH AND WITHOUT SLOPE. GRATE OPTIONS FOR LOAD CLASSES A-E WITH PRESSURE OR LOCKING BOLT SECURING DEVICES SHALL BE AVAILABLE, SUPPLIED BY TRENCH DRAIN SUPPLY.</p>
--	--

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.