


Location:



Stainless Steel Slotted Grate  
to suit 4" clear opening channels



**Specification:** T100-PGA-3-FS stainless steel slotted grates are independently certified to meet Load Class A tested in accordance with EN1433 (3,372 lbs (15kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional (.5 m) grates are also available in Load Class A (Part # T100-PGA-3-FS-500).

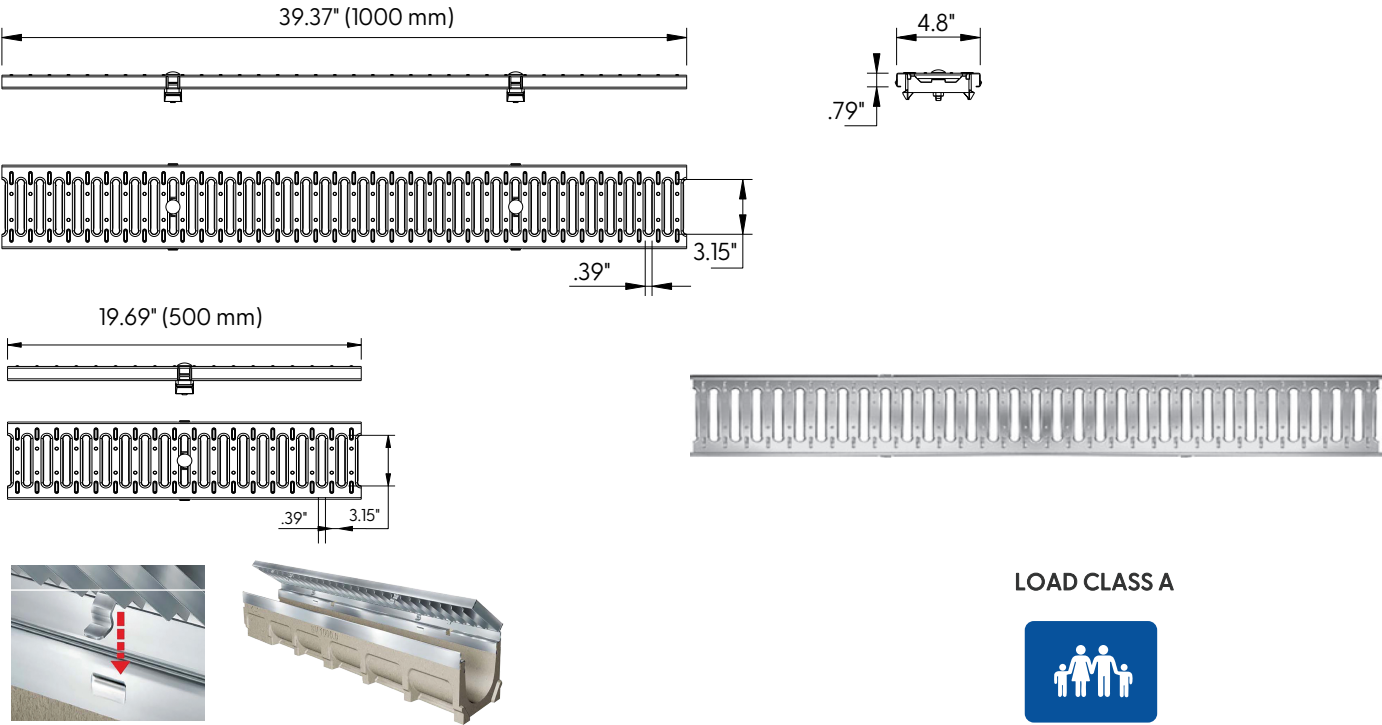

CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS A



A: EN 1433 - 3,372 lbs.,  
15kN, 70 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGA-3-FS	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGA-3-FS-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGA-3-FS	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGA-3-FS-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Supplied By:  
**TRENCHDRAIN  
SUPPLY**  
877-903-7246  
www.trenchdrainsupply.com

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_