


Location:



Stainless Steel Longitudinal Grate to suit 4" clear opening channels



Specification: T100-PGB-3-LS stainless steel longitudinal grates are independently certified to meet Load Class B tested in accordance with EN 1433 (28,100 lbs. (125kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 meter grates are also available in Load Class B (Part # TP100-PGB-3-LS-500).

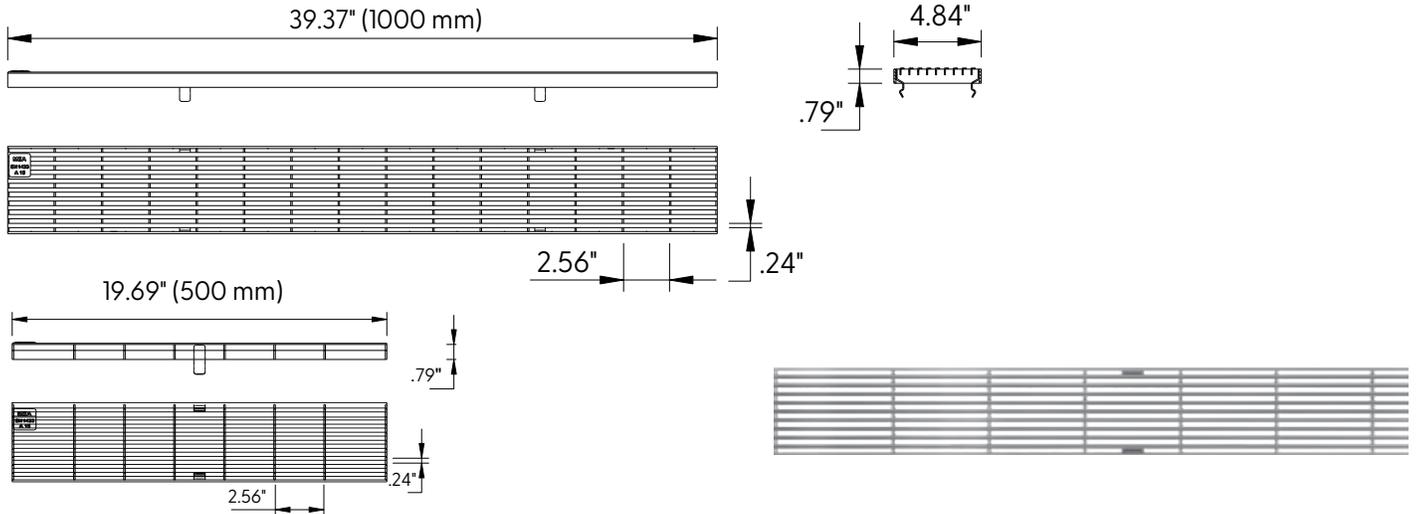

CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS B



EN 1433 - 28,100 LBS.,
125kN, 580 PSI

Compliance



ADA



HEELPROOF

| GRATE MODEL NUMBER | LENGTH | USED WITH |
|--------------------|------------------|--|
| T100-PGB-3-LS | 39.37" (1000 mm) | T1500 Concrete Channel |
| T100-PGB-3-LS-500 | 19.69" (500 mm) | T1500 Concrete Channel |
| TP100-PGB-3-LS | 39.37" (1000 mm) | T1400 Plastic Channel or T1330 Aluminum Channel |
| TP100-PGB-3-LS-500 | 19.69" (500 mm) | T1400 Plastic Channel or T1330 Aluminum Channel |

Supplied By:

877-903-7246
www.trenchdrainsupply.com

| | |
|--------------------|--------------------------|
| Job Name: _____ | Page No: _____ |
| Section No: _____ | Contractor: _____ |
| Schedule No: _____ | Purchase Order No: _____ |

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.