


Location:



## Ductile Iron Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGC-4-HP ductile iron grates are independently certified to meet Load Class C tested in accordance with EN 1433 56,200 lbs. 250kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

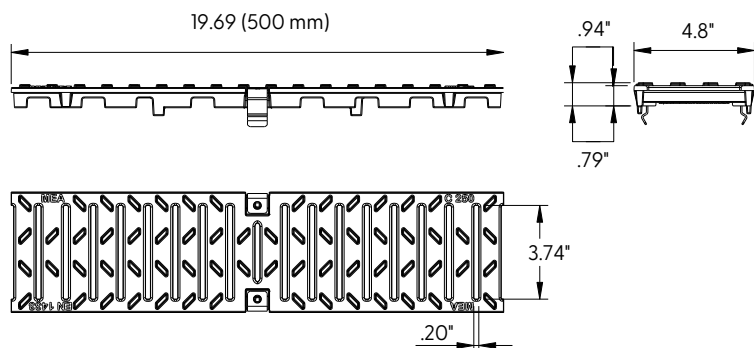

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

### Compliance



HEELPROOF

Supplied By:

**TRENCHDRAIN  
SUPPLY**  
877-903-7246  
www.trenchdrainsupply.com

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-4-HP	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-4-HP	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_