



Location: \_\_\_\_\_



## Ductile Iron Longitudinal Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGE-4-ADA ductile iron longitudinal slotted grates are independently certified to meet Load Class E tested in accordance with EN 1433 134,800 lbs. 600kN. The grate length is 19.69" (.50 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

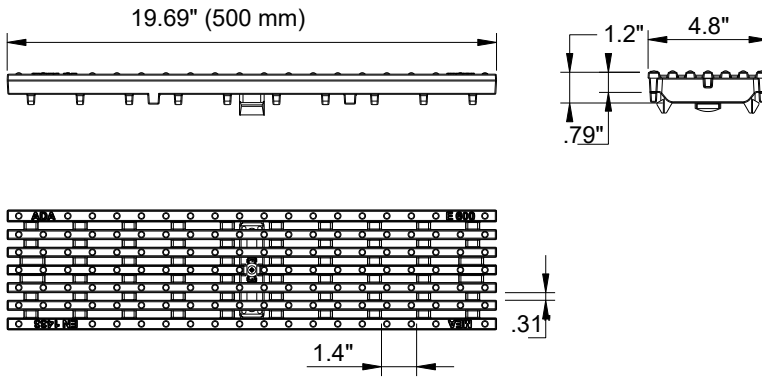

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS E



EN 1433  
134,800 LBS.,  
600kN, 2,785 PSI

### Compliance



ADA



HEELPROOF

Supplied By:  
**TRENCH DRAIN  
SUPPLY**  
877-903-7246  
www.trenchdrainsupply.com

GRATE MODEL NUMBER	LENGTH
T100-PGE-4-ADA	19.69" (500 mm)

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 2023-02-06

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880