

Location:





T1560-PB-3 with Stainless Steel Integral Rail






Specification:

MIFAB®'s T1560-PB-3 series channels shall be 39.4" (1000 mm) long with a 4" (100 mm) internal width and shallow bottom. Interconnecting channel sections are made from high strength Polymer Concrete and available in non-sloping (neutral) channels. Each channel comes with a standard stainless steel edge rail which is mechanically embedded in the channel.

System is available with 4" preformed bottom outlet. End caps and catch basins are available accessories. Grates (separate specification sheets) are available in Load Class A-E in a variety of material. Grates utilize the patented "Clipfix" locking mechanism.

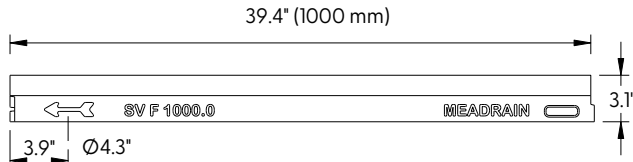

T1560N-PB-3

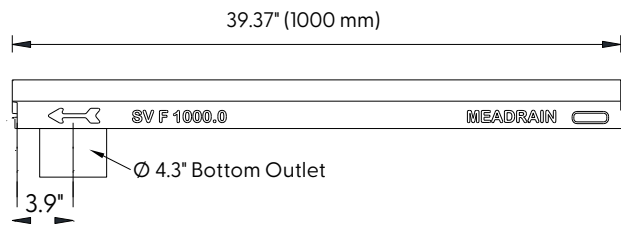

T1560N-PB-3-BO4

| CHANNEL MODEL NUMBER | WEIGHT (LBS.) |
|----------------------|---------------|
| T1560N-PB-3 | 21.87 |
| T1560N-PB-3-500 | 10.80 |
| T1560N-PB-3-BO4 | 21.38 |



CLIPFIX ADVANTAGE

The MEA polymer concrete channels have been designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

| | |
|--------------------|--------------------------|
| Job Name: _____ | Page No: _____ |
| Section No: _____ | Contractor: _____ |
| Schedule No: _____ | Purchase Order No: _____ |

Revision Date: 11/10/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880