


Location:



Stainless Steel Mesh Grate to suit 8" clear opening channels

Specification: T200-PGA-3-SM stainless steel mesh grates are independently certified to meet Load Class A tested in accordance with EN 1433 (3,372 lbs (15kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 m grates are also available in Load Class A (Part # T200-PGA-3-SM-500).

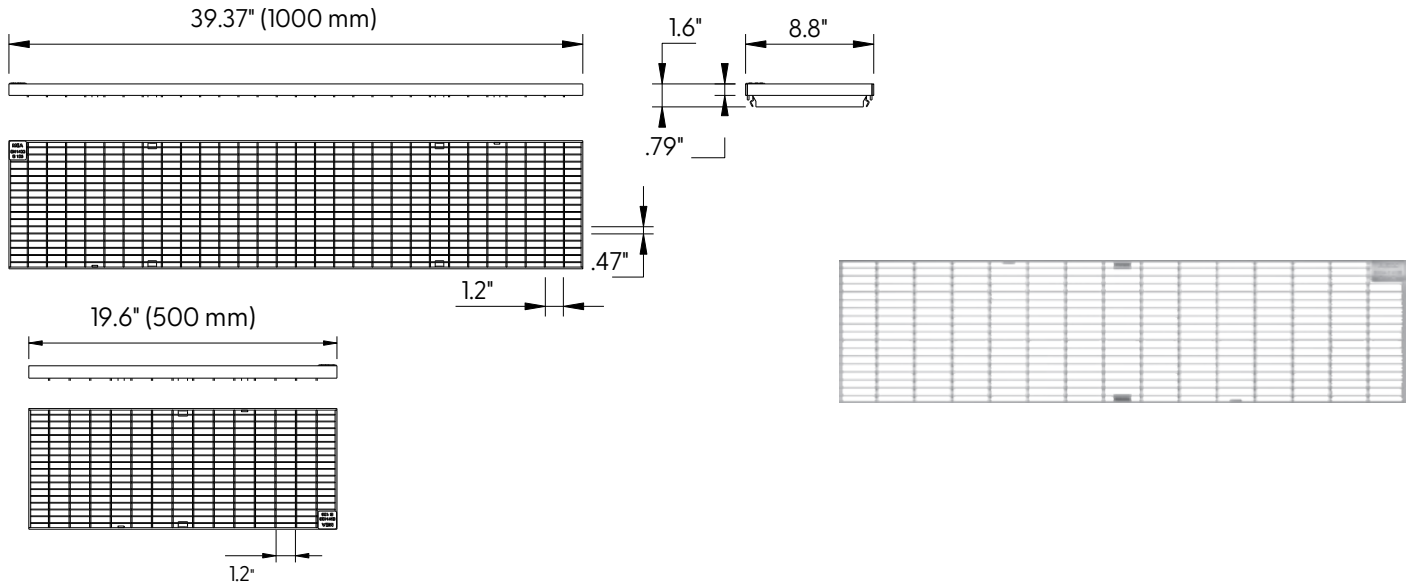

CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS A

Compliance



EN 1433 - 3,372 LBS.,
15kN, 70 PSI



ADA

| GRATE MODEL NUMBER | LENGTH | USED WITH |
|--------------------|------------------|--|
| T200-PGA-3-SM | 39.37" (1000 mm) | T1700 Concrete Channel |
| T200-PGA-3-SM-500 | 19.69" (500 mm) | T1700 Concrete Channel |
| TP200-PGA-3-SM | 39.37" (1000 mm) | T2000 Plastic Channel or T1360 Aluminum Channel |
| TP200-PGA-3-SM-500 | 19.69" (500 mm) | T2000 Plastic Channel or T1360 Aluminum Channel |

Supplied By:

**TRENCHDRAIN
SUPPLY**

877-903-7246

www.trenchdrainsupply.com

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.