


Location:



Ductile Iron Slotted Heelproof Grate
to suit 8" clear opening channels



Specification: T200-PGC-4-HP ductile iron slotted heelproof grates are independently certified to meet Load Class C tested in accordance with EN 1433 56,200 lbs. 250kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

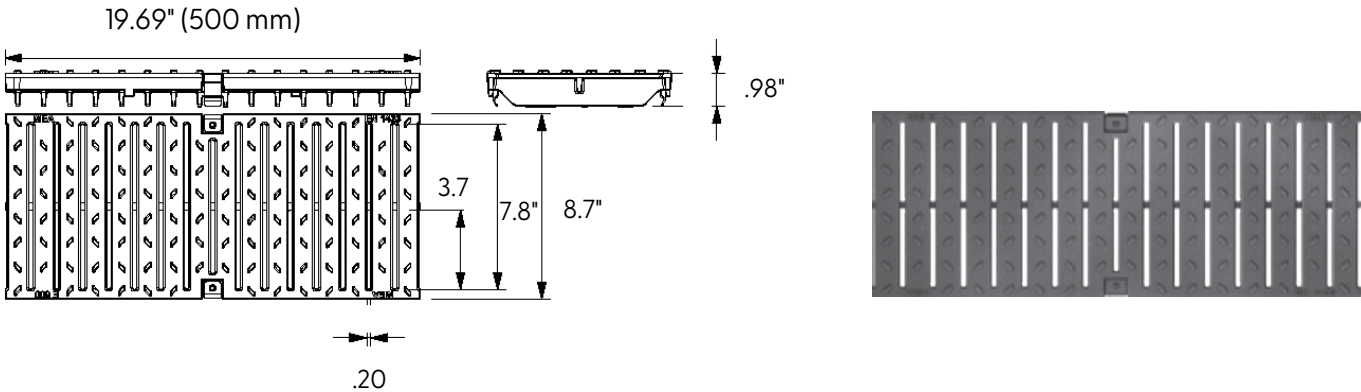

CLIPFIX ADVANTAGE
The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS C



EN 1433 - 56,200 LBS.,
250kN, 1160 PSI

Compliance



HEELPROOF

Supplied By:
**TRENCHDRAIN
SUPPLY**
877-903-7246
www.trenchdrainsupply.com

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGC-4-HP	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGC-4-HP	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____