


Stainless Steel Mesh Grate to suit 12" clear opening channels



Specification: T300-PGC-3-SM stainless steel mesh grates are independently certified to meet Load Class C tested in accordance with EN 1433 (56,200 lbs (250kN). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 m grates are also available in Load Class C (Part # T300-PGC-3-SM-500).

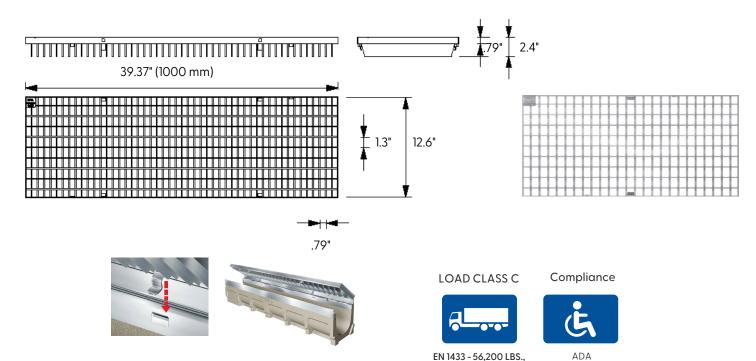

CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels and designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

rete and GRP channels are	
sal CLIPFIX grate locking	
(channel and grate)	
nift protection.	

250kN, 1160 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T300-PGC-3-SM	39.37" (1000 mm)	T1800 Concrete Channel
T300-PGC-3-SM-500	19.69" (500 mm)	T1800 Concrete Channel
TP300-PGC-3-SM	39.37" (1000 mm)	T3000 Plastic Channel
TP300-PGC-3-SM-500	19.69" (500 mm)	T3000 Plastic Channel

Supplied By:	
TRENCHDRAIN	
SUPPLY	
877-903-7246	
www.trenchdrainsupply.com	

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.