

Dura Slope Radius Coupling & Grates



DSRC-103

DSRC-097

Radius Coupling Part Number and Description	Corresponding Dura Slope™ Trench Drain
DSRC-097: 6.35" Deep Dura Slope™ Radius Coupling	DS-097N: 6.35" Deep Neutral Dura Slope™ Trench Drain
DSRC-100: 7.36" Deep Dura Slope™ Radius Coupling	DS-100N: 7.36" Deep Neutral Dura Slope™ Trench Drain
DSRC-103: 8.37" Deep Dura Slope™ Radius Coupling	DS-103N: 8.37" Deep Neutral Dura Slope™ Trench Drain
DSRC-106: 9.37" Deep Dura Slope™ Radius Coupling	DS-106N: 9.37" Deep Neutral Dura Slope™ Trench Drain

Part #: DSRC-097, DSRC-100, DSRC-103, DSRC-106

Material: High Density Polyethylene (HDPE)

Colors: Gray

Grate Opening: Solid,

Open Area between Grates; 3/8" x 6" = 2.25 Sq. Inches

Head Pressure / Flow Rate:

0.5" = 61.92 GPM Per Foot

1.0" = 87.57 GPM Per Foot

Weight Per Each: DSRC-097 (0.81 lbs) DSRC-100 (0.82 lbs)

DSRC-103 (0.83) DSRC-106 (0.84 lbs)

UV Inhibitors



Class B

- Loads of 61-175 psi.
- Recommended for medium-duty pneumatic tire traffic, autos and light trucks at speeds less than 20 m.p.h.

ADA Compliant


Supplied By:

**TRENCHDRAIN
SUPPLY**

877-903-7246

www.trenchdrainsupply.com

Dura Slope Radius Coupling & Grates

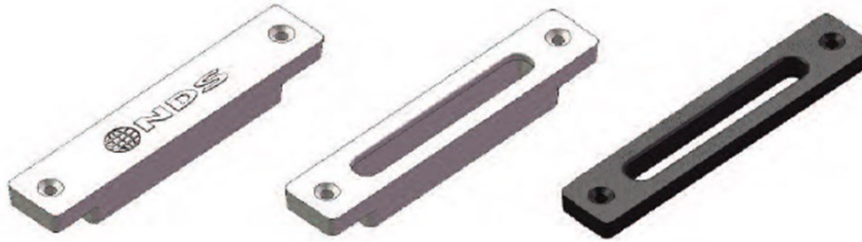

Part No. DS-681LGMG
(included with every radius
coupling)

Part Nos. DS-660MG - 665MG
Polyolefin

Part No. DS-232MG
Ductile Iron

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Load Class	Specifications
DS-660MG	1.25" Plastic Slotted Radius Coupling Grate	White	6	0.08	Class B (61-175 psi)	Structural Foam Polyolefin Radius Coupling Mini Grate with UV inhibitors
DS-661MG	1.25" Plastic Slotted Radius Coupling Grate	Dark Gray	6	0.08	Class B (61-175 psi)	Structural Foam Polyolefin Radius Coupling Mini Grate with UV inhibitors
DS-661LGMG	1.25" Plastic Slotted Radius Coupling Grate	Light Gray	6	0.08	Class B (61-175 psi)	Structural Foam Polyolefin Radius Coupling Mini Grate with UV inhibitors
DS-662MG	1.25" Plastic Slotted Radius Coupling Grate	Green	6	0.08	Class B (61-175 psi)	Structural Foam Polyolefin Radius Coupling Mini Grate with UV inhibitors
DS-663MG	1.25" Plastic Slotted Radius Coupling Grate	Black	6	0.08	Class B (61-175 psi)	Structural Foam Polyolefin Radius Coupling Mini Grate with UV inhibitors
DS-664MG	1.25" Plastic Slotted Radius Coupling Grate	Sand	6	0.08	Class B (61-175 psi)	Structural Foam Polyolefin Radius Coupling Mini Grate with UV inhibitors
DS-665MG	1.25" Plastic Slotted Radius Coupling Grate	Brick Red	6	0.08	Class B (61-175 psi)	Structural Foam Polyolefin Radius Coupling Mini Grate with UV inhibitors
DS-681LGMG	1.25" Plastic Standard Radius Coupling Grate	Light Gray	6	0.16	Class B (61-175 psi)	Structural Foam Polyolefin Radius Coupling Mini Grate with UV inhibitors
DS-232MG	1.25" Ductile Iron Radius Coupling Grate	Black	6	0.93	Class D (326-575 psi)	Heavy Duty Ductile Iron Radius Coupling Mini Grate

All Dura Slope™ Radius Coupling Grates are ADA Compliant

Part No. DS-681LGMG is Heel-Proof

Grate Opening: 1.88 Sq. Inch Per Each

Open Area between Grates; 3/8" x 6" = 2.25 Sq. Inches

Head Pressure / Flow Rate

0.5" = 113.67 GPM Per Foot

1.0" = 160.83 GPM Per Foot

UV Inhibitors