



FILE NAME:

NDS-ts-dura-slope-channel-drain-grate-deco-via-load-d-iron-611-en


NDS
 FLOW MANAGEMENT

TECHNICAL SPECIFICATION

DURA SLOPE GRATE—"VIA"

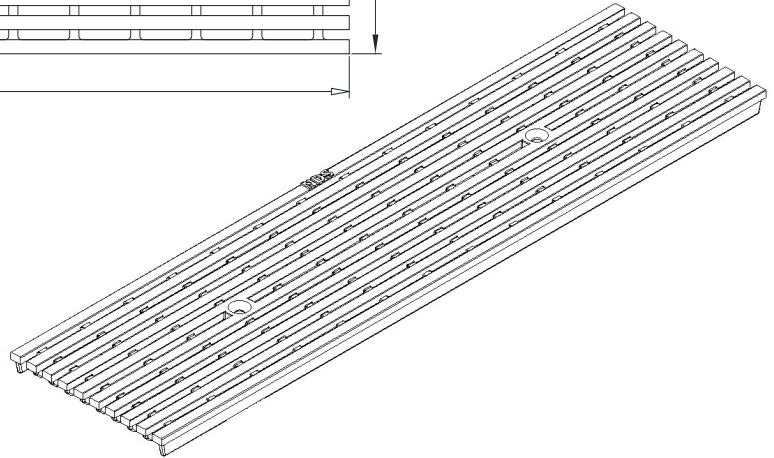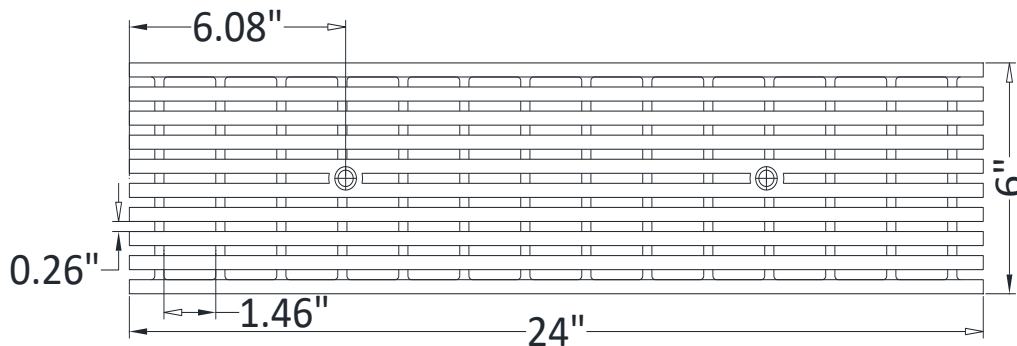

Supplied By:
**TRENCH DRAIN
 SUPPLY**
 877-903-7246
www.trenchdrainsupply.com

PART NUMBER	SIZE	SLOT WIDTH	LOAD CLASS	INLET AREA / FOOT FLOW RATE W/ 1/2" HEAD	WEIGHT	ADA	HEEL PROOF
DS-611-VIA	6"x 24" x 0.75"	0.26"	C, D*	23.63 in ² / LF 72.4 gpm / LF	10.4 LBS	YES	YES

SPECIFICATION:

MATERIAL: DUCTILE IRON 6" x 24" x 3/4"


NDS LOAD CLASS C—LOADS OF 176-325 PSI, RECOMMENDED FOR HEAVY DUTY PNEUMATIC TIRE FORKLIFTS AND TRACTOR-TRAILERS AT SPEEDS LESS THAN 20 M.P.H., H-20 RATED

***NDS LOAD CLASS D** (REQUIRES DS-200H DUCTILE IRON FRAME) - LOADS OF 326-575 PSI. RECOMMENDED FOR HEAVY-DUTY HARD TIRE FORKLIFTS AT SPEEDS LESS THAN 20 M.P.H., H-20 RATED

REQUIRES (2) FH #1/4-20 X 1-1/2" SCREWS #629 (SUPPLIED WITH CHANNEL)

FITS ALL DURA SLOPE CHANNEL SECTIONS AND IN-LINE CATCH BASIN (DS-340)

— 2 GRATES PER 4 FT CHANNEL — MADE IN ITALY



DURA SLOPE "VIA" GRATE

ADA / DUCTILE IRON / NDS LOAD CLASS D

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com, DESIGN ASSISTANCE- designworx@ndspro.com

851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994