
Supplied By: 877-903-7246 www.trenchdrainsupply.com 

## R-4014-T **Overhead Scupper Drain, Bolted Grate**

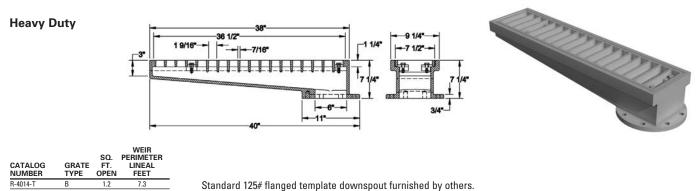

## **R-4014-TL Overhead Scupper Drain, Bolted Grate**

1/2"(TYP.)

**Heavy Duty** 



9

## WEIR ERIMETER SQ. FT. OPEN P LINEAL FEET

7.3

31/2" <u>\*</u> 23/8" <del>\*</del>

CATALOG NUMBER GRATE TYPE R-4014-TL 0.5

Standard 125# flanged template downspout furnished by others.

6"-

11"

363/4

40

29

4" (TYP.

91/4"

DRILL AND TAP 8 HOLES FOR 3/4"-10 UNC BOLTS ON 9 1/2" ¿ BOLT CIRCLE.

11/4"-

**H**−71/2"

71/4

## R-4014-T2 **Overhead Scupper Drain, Bolted Grate**

**Heavy Duty** 

CATALOG NUMBER

R-4014-T2

R-4014-T2L

R-4014-T2V

G. T. PEN	WEIR PERIMETER LINEAL FEET	3 1/2" 1/2" 1/2" 1/2" 1/2" 1/2" 1/2" 1/4" 7 1/2" 7 1/4" 7 1/	9 1/4"→
).7	4.5	- 3/4" DIA, HEX HD, BOLTS	-
D.3	4.1	AND WASHERS 8 REQUIRED	E .
).3	4.1	ON 9 1/2" DIA. BOLT CIRCLE	RNISHED



Standard 125# flanged template downspout furnished by others. Standard Grate (shown): Type B Available with Type L grate, order R-4014-T2L. Available with Type V grate, order R-4014-T2V.

S

0

0

0

GRATE TYPE OP

