

## R-4995 – R-4996

### TYPE M TRENCH FRAME WITH SOLID OR GRATED COVER

Cast Iron Trench Assemblies—Light or Heavy Duty—For Use in Sidewalks, Driveways, Garages, Loading Docks, etc.



#### Read Carefully Before Ordering

##### Specify:

1. Complete catalog number.
2. Light or heavy duty.
3. Overall length of cover required.
4. Lid solid, flat grated, or diagonally barred convex grate.
5. Location of outlet, side, bottom or end (give dimensional location and pipe size).
6. Whether one end or both ends are to be open or closed.




Illustrating Type M frame with grated cover. Standard with 4-inch outside caulk outlet. Can be equipped for inside caulk if specified.

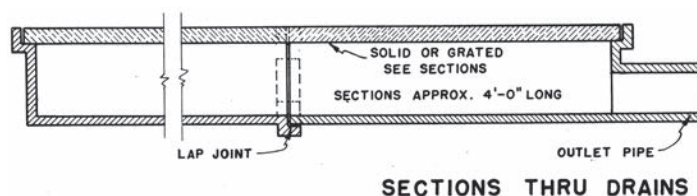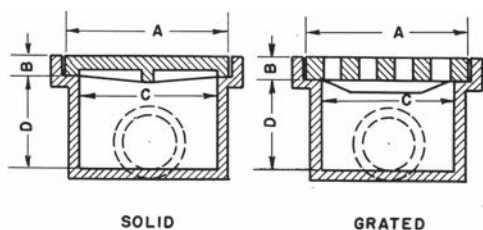

Trench covers are used over areas requiring long drainage assemblies. Can be supplied in a variety of sizes and lengths to meet special needs. For trenches of irregular pattern, product engineering can provide layout drawings.

Standard 4-inch outlet at end of drain. Special size outlets are available. Provided with side and bottom outlets optional and furnished only when specified.

#### Sections: Thru Drains, Type M

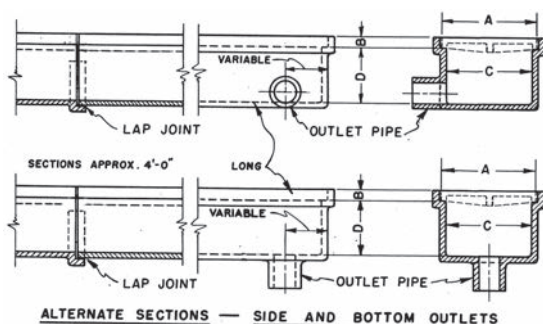

Dimensions in inches

Catalog No.	Description	A	B	C	D	Length
<b>Standard Sizes—Light Duty</b>						
R-4995-A1**	With grated cover	11½	¾	10	6¾	As ordered
R-4995-A2*	With grated cover	7	¾	5	4¾	As ordered
R-4995-B1	With solid cover	11½	¾	10	6¾	As ordered
R-4995-B2	With solid cover	7	¾	5	4¾	As ordered

#### Standard Sizes—Heavy Duty

R-4996-A1**	With grated cover	11½	1½	10	6	As ordered
R-4996-A2*	With grated cover	7	1¼	5	4¾	As ordered
R-4996-B1	With solid cover	11½	1½	10	6	As ordered
R-4996-B2	With solid cover	7	1¼	5	4¾	As ordered

Above Standard Frames made in 4 ft. sections, covers in 2 ft. lengths.

\*Available with Type B grate only.

\*\*Also available with Type P grate.