
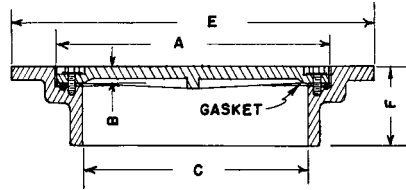


R-6460 Series

Pressure-Type Round Manhole Frame, Bolted Lid Water-, Gas-, and Steamtight

Heavy Duty



Suitable for low pressure application up to 20 p.s.i.

NOTE: Bolting pads reduce effective clear opening (dimension C) by 2" to 3". If "C" dimension is critical, select larger size.

Units are shipped assembled with gasket glued to frame.

Catalog No.	Dimensions in inches					No. of Bolts
	A	B	C	E	F	
R-6460-A	21	1 1/2	18	27 1/2	5	four
R-6460-B	23	1 3/4	21	30	4	four
R-6460-C	27	1 1/4	23 1/2	33 1/2	4	four
R-6460-D	29	1 3/4	27	35	6	six
R-6460-G1	38	1 1/2	36	49	4 1/2	six

R-6461 to R-6462 Series

Pressure-Type Round Manhole Frame, Bolted Lid Water-, Gas-, and Steamtight

Heavy Duty


Suitable for low pressure application up to 20 p.s.i.

Frames in this series are reversible and can be installed with the flange at top for slab construction or with flange at base for use with built-up manhole.


Slab construction type manhole covers are sized to fit in the opening of corrugated metal pipe from 12" to 48" in diameter.

Furnished standard with concealed, watertight pickhole. Lids sealed with gasket and fastened with stainless steel bolts.

Units are shipped assembled with gasket glued to lid.

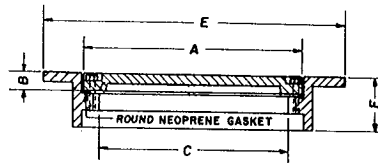

Illustrating R-6461-EH Slab Type

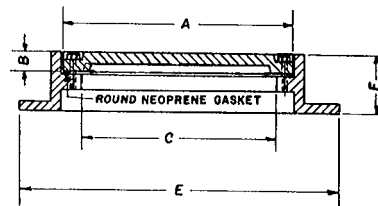

Illustrating R-6462-EH Built-up Type

Catalog No. Slab Type	Catalog No. Built-Up Type	Dimensions in inches					No. of Bolts
		A	B	C	E	F	
R-6461-AH	R-6462-AH	10 1/4	1 1/2	6 1/2	14 1/2	4	four
R-6461-BH	R-6462-BH	13 1/4	1 1/2	9 1/2	17 1/2	4	four
R-6461-CH	R-6462-CH	16 1/4	1 1/2	12 1/2	20 1/2	4	four
R-6461-DH	R-6462-DH	18 1/4	1 1/2	14 1/2	22 1/2	4	four
R-6461-EH	R-6462-EH	22 1/4	1 1/2	18 1/2	26 1/2	4	four
R-6461-FH	R-6462-FH	25 1/4	1 1/2	21 1/2	29 1/2	4	four
R-6461-GH	R-6462-GH	28 1/4	1 1/2	24 1/2	32 1/2	4	six
R-6461-HH	R-6462-HH	34 1/4	1 1/2	32 1/2	38 1/2	4	six
R-6461-JH	R-6462-JH	40	1 1/2	36 1/2	44 1/2	4	six
R-6461-KH	R-6462-KH	46 1/8	1 1/2	42 1/2	50 1/2	4	six