
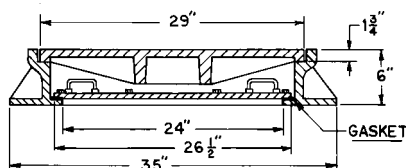


R-1757-G**Gas/Water/Steamtight Frame,
Solid Lid and Inner Lid****Heavy Duty**

Furnished with stainless steel hex head cap screws and neoprene gasket. Lids are furnished with Type F concealed pickholes. Units are shipped assembled with gasket glued to frame.

**R-1758 Series****Frost-Retardant Frame,
Solid Lid and Inner Lid****Heavy Duty**

Available with machined horizontal bearing surface on top lid, if requested.

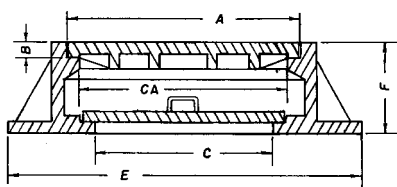

Dimensions in inches

Catalog No.	A	B	C	CA	E	F	Lid
R-1758-B	23	1 1/2	18	20 1/2	36	9	Type B
R-1758-C	34	1 1/2	20	22 1/2	35	7 1/2	Type C
R-1758-D	25	1 1/2	21	23	38	9	Type C
R-1758-E	26	1 1/2	22	24	38	7	Type C
R-1758-G	32	1 1/2	28	30 1/2	46	7	Type B

R-1760**Non-Rock Manhole Frame,
Solid Lid****Heavy Duty**