

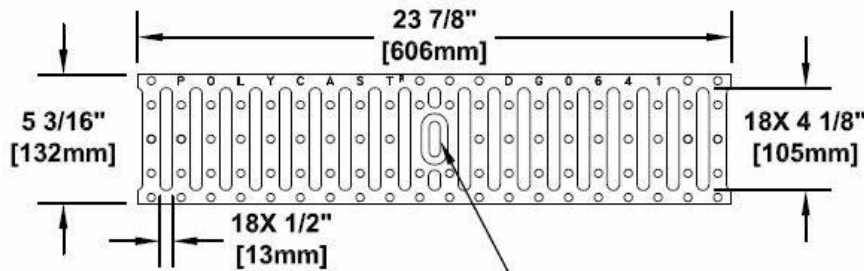


<p><b>Number</b></p> <p style="text-align: center;"><b>DG0641</b></p>	<p><b>Series</b></p> <p style="text-align: center;"><b>TPC600 / 700</b> C Class Ductile Iron Grate Polycast 600 / 700 Series</p>
---	--

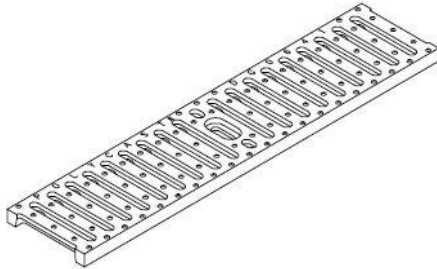

**7/16 [11mm] X 1 7/16 [37mm] FULL RADIUS THRU  
SLOT W/ 1 1/16 [27mm] X 2 1/16 [52mm] X 5/16 [8mm]  
DEEP FULL RADIUS RECESS**

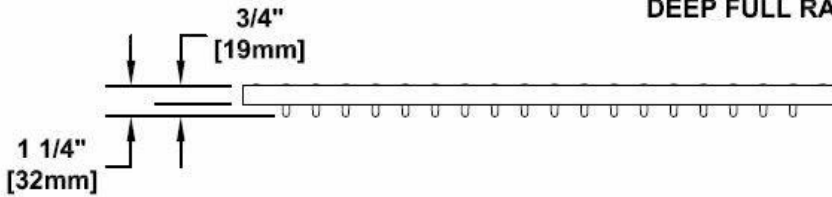

**DIN APPLICATION LOAD CLASS C:**  
Curb sides, highway shoulders, and parking areas  
Designed for a distributed pressure of 56,200 lbs (250 kN).

Meets the following Standards & Specifications:

- DIN 19580 / DIN EN 1433 Drainage Channels for Vehicular and Pedestrian Areas
- Australian Standard AS 3996-2006 Clause 3.3.6

**Manufacturer**



**Specification**

POLYCAST DG0641 IS APPROPRIATE FOR MANY GENERAL USE CONDITIONS. GRATE LOCKING DEVICE PART NO DA0642B SHOULD BE USED AND MAINTAINED SECURE. THE GRATE HAS 39% (40IN<sup>2</sup>) OF OPEN AREA. THE GRATE IS MADE OF ASTM A48 GR. 30-B OR GR. 35-B AND WEIGHS APPROXIMATELY 14LBS. THE GRATE IS ONLY AVAILABLE IN A 24q(610mm) LENGTH. MEETS LOAD CLASS C.

**DISCLAIMER** - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.