
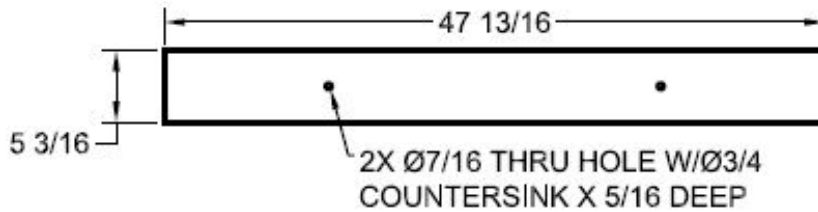


<p>Number</p> <p style="text-align: center;">DG0667R</p>	<p>Series</p> <p style="text-align: center;">TPC600</p> <p style="text-align: center;">C Class Reinforced Stainless Solid Polycast 600</p>
--	--

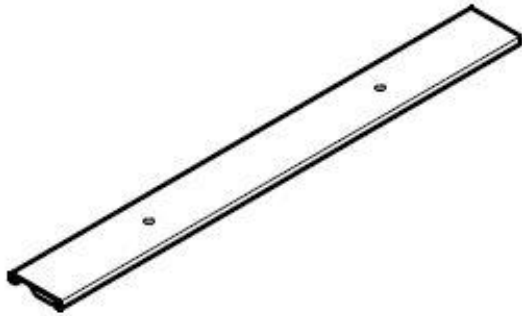

DIN APPLICATION LOAD CLASS C:
Curb sides, highway shoulders, and parking areas
Designed for a distributed pressure of 56,200 lbs (250 kN).

Meets the following Standards & Specifications:

- DIN 19580 / DIN EN 1433 Drainage Channels for Vehicular and Pedestrian Areas
- The Americans with Disabilities Act of 1990; 4.5.4
- ASME A112,6,3; Section 7,12 Heel Resistant Strainers and Grates
- Australian Standard AS 3996-2006 Clause 3,3,6

Manufacturer



Specification

POLYCAST DG0667R REINFORCED STAINLESS STEEL SOLID COVER IS DESIGNED FOR PIPE RUNS, E.G. SECONDARY CONTAINMENT OR CABLE RUNS. ESPECIALLY SUITED FOR AREAS EXPOSED TO MILD ACIDS OR BASES. REMOVABLE COVER ALLOWS FULL ACCESS LOCKING DEVICE DA0642S SHOULD BE USED. THIS GRATE IS ADA COMPLIANT MEETS LOAD CLASS C.

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.