


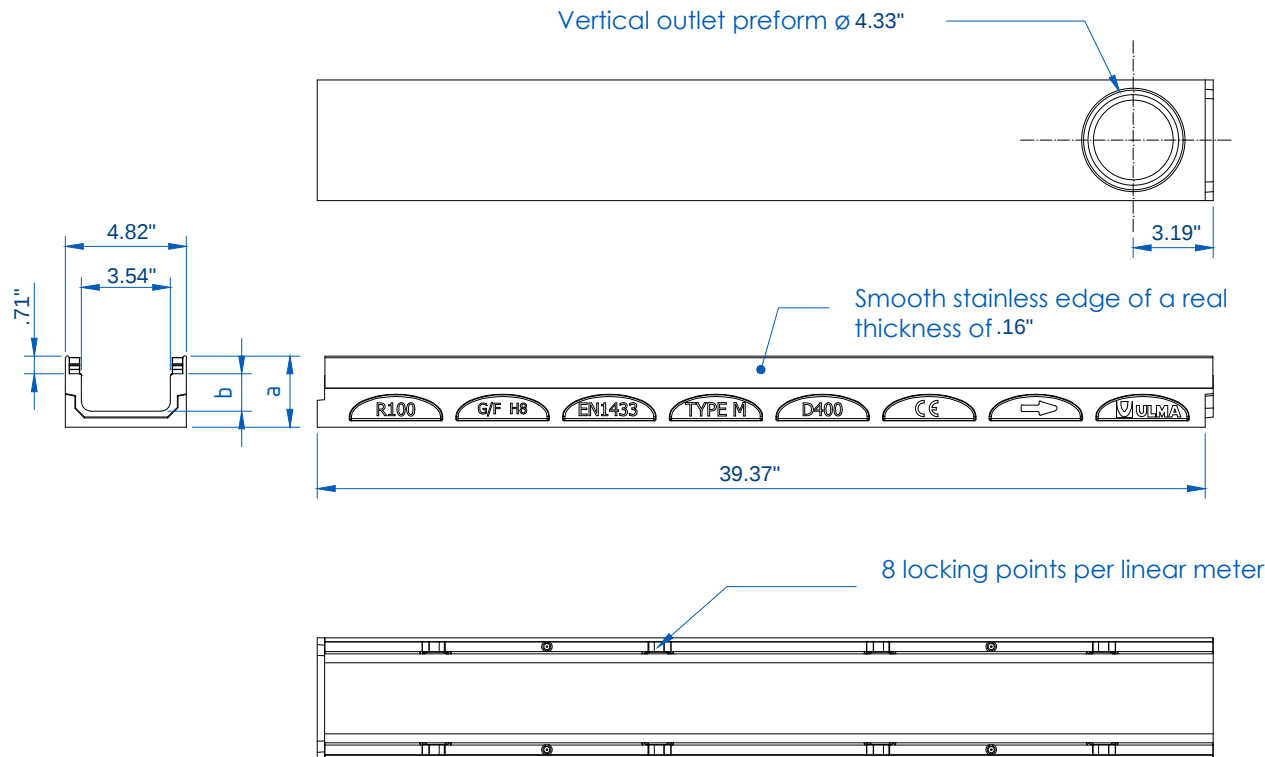

multiV+® R100GXH8						
External width: 5.35"						
Internal width: 3.94"						
Length: 39.37"						
Channel reference:	Height (in.)		Hydraulic section(in. ²)	Ø outlet (in.)		
	a	b		Vert.	Horiz.	
R100GXH8	3.15"	1.57"	6.2"	4.33"	-	

Supplied By:
TRENCHDRAIN
SUPPLY
 877-903-7246
 www.trenchdrainsupply.com

Review:2019-10

Description

ULMA polymer concrete linear drainage channel model multiV+® R100GXH8. Protective stainless steel edge with a real thickness of 0.16 in. , smooth, without breakage of the protective zinc layer, avoiding water accumulation and preventing corrosion. Boltless locking system ULMA Rapidlock®, 8 fixing points per lm for higher mechanical stability. Load class up to D400, EN 1433 Standard. Vertically and horizontally channel aligning tongue and groove joints. CE Conformity Declaration and compliance with EN 1433 Standard. External width 136mm, internal width 100mm and total length 1000mm. Total height 80mm.

ULMA Architectural Solutions reserves the right to modify the specifications of any of its products without prior notice.

Information about the shown products is only indicative and is based on the existing technical features at the time of issuing.

In the event of any discrepancy in the translation of this document into different languages, the Spanish version will be used.

Latest version in www.ulmaarchitectural.com

For more details, see technical sheets and installation guide.



ARCHITECTURAL SOLUTIONS



Tel.: +34 943 78 06 00
 info@ulmaarchitectural.com
 ulmaarchitectural.com