www.trenchdrainsupply.com


ULG100 Complete Kit

Series

ULG100

Cover Sheet ULG100

4" Wide Multi V 100 Galvanized Edge Polymer Concrete Sloped Trench Drain Kit

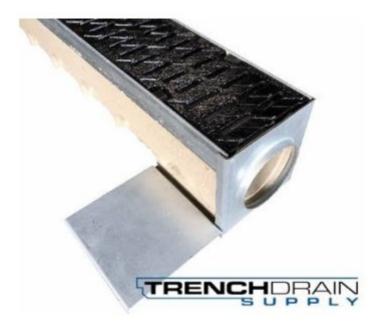

Polymer Concrete Sloped Trench Drain Kit Integrated Galvanized Edge

Complete Kit Includes:

Specified # of 1 Meter Trench Drain Channels

Specified # of 1/2 Meter Grates (D Class Ductile Iron Standard) with Integrated Locks

> 1 - Outlet End Cap 1 - Solid End Cap



1-877-903-7246

www.trenchdrainsupply.com

Number Series **ULG100** R100Gxx Trench Drain Channel MultiV100 - Galvanized Edge Optimized V-shaped section 5 3/8" Vertical outlet preform ø 4 3/8" PLOS TOPEN TOPEN TOPEN Groove for sealing joint 3 1/2" 39 3/8" Smooth galvanized edge of a real thickness of .0787" + .0787" 8 locking points per linear meter

Manufacturer



Specification

ULMA Linear Drainage Channel, type MULTIV+ R100G; Ext width 5 3/8" mm, Internal width 4" with overall heights between 4" and 11"; suitable for cascade-type slopes to collect rainwater; sections 39 3/8" length; optimized V-shape with self-cleaning effect; galvanized steel edges for lateral protection; Rapidlock® boltless system.



Number

R100Gxx Dimensions

Series

ULG100

Trench Drain Channel MultiV100 - Galvanized Edge
















FAST, BOLTLESS SAFETY LOCKING 8 fastening points



Manufacturer



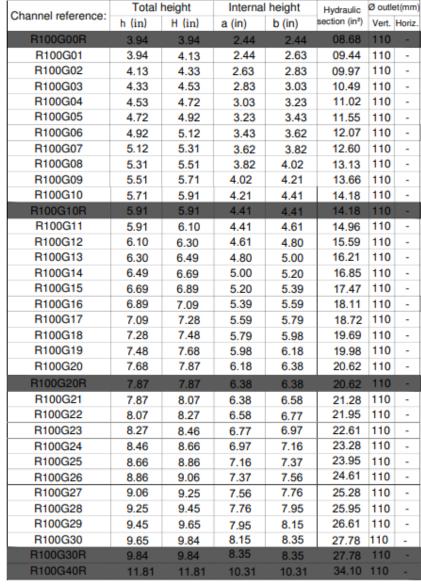

MULTIV¹

Manufacturer



Specification

ULMA Linear Drainage Channel, type MULTIV+ R100G; Ext width 5 3/8" mm, Internal width 4" with overall heights between 4" and 11"; suitable for cascade-type slopes to collect rainwater; sections 39 3/8" length; optimized Vshape with self-cleaning effect; galvanized steel edges for lateral protection; Rapidlock® boltless system.



Number

AR100G


Series


MULTIV 200


Galvanized edge Catch Basin



PART NUMBER	<u>DIMENSIONS</u>	
AR100G	19.3" [490MM]	







Manufacturer




Specification

ULMA AR100G GALVANIZED EDGE POLYMER CONCRETE CATCH BASIN

SUPPLIED BY TRENCH DRAIN SUPPLY



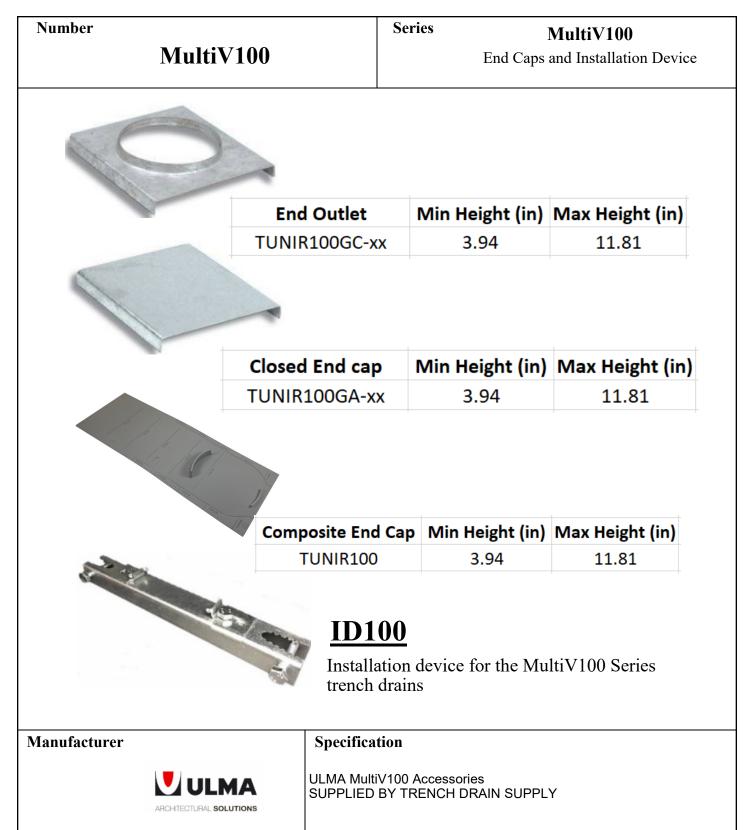

1-877-903-7246



www.trenchdrainsupply.com

Number **Series ULG100** D Class Ductile Iron ADA Grate FNHX100RGDM MultiV100 **D** Class 2 Ridges and grooves at 45 8 fixing points per Im degrees to divert water Manufacturer **Specification** ULMA MULTIV100 SERIES ADA GRATE. LOAD CLASS D400 EN

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO

1433 STANDARD. ADA AND HEELPROOF. CASTED ESPHERIODAL GRAPHITE DUCTILE IRON, EN 1563 STANDARD. BOLTLESS RAP-




Number FNLHX100RGEM

Series

MULTIV 100

E Ductile Cast Iron Slotted



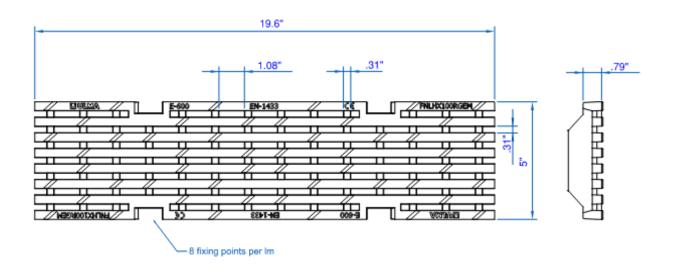

Manufacturer



Specification

ULMA FNLHX100RGEM DUCTILE CAST IRON SLOTTED TRENCH DRAIN GRATE WITH CLASS E LOAD RATING (169,800 LBS.—5700 PSI), SUPPLIED BY TRENCH DRAIN SUPPLY



Number **Series MULTIV 100 GNLHX100RGC** C Class Galvanized Longitudinal Grate C Class 39.37 2 31 **WULLMA** C€ EN-1433 C250 GNLHX100RGC

Manufacturer



Specification

ULMA MULTIV100 SERIES LONGITUDINAL ADA GRATE. LOAD CLASS C250 EN 1433 STANDARD. ADA AND HEELPROOF. HOT DIPPED GALVANIZED STEEL, EN ISO 1461 STANDARD. BOLTLESS RAPIDLOCK LOCKING SYSTEM. SUPPLIED BY TRENCH DRAIN SUPPLY.

1-877-903-7246



www.trenchdrainsupply.com

Number **Series ULG100** C Class Composite ADA Grate PNHX100RGCM MultiV100 1.24" C Class 39.37" .31" Ridges and grooves at 45 degrees to divert water 8 fixing points per lm

Manufacturer



Specification

ULMA MULTIV100 SERIES ADA COMPOSITE GRATE. LOAD CLASS C250 EN 1433 STANDARD. ADA AND HEELPROOF. BOLTLESS RAPIDLOCK LOCKING SYSTEM. SUPPLIED BY TRENCH DRAIN SUPPLY.