

ULG150 Complete Kit

Series

ULG150

Cover Sheet

ULG150

6" Wide MultiV Galvanized Edge Concrete Trench Drain Kit 3 - 99 Foot Complete


**New Commercial Trench Drain / Driveway Drain
 6 Inch Wide - D Class Ductile Iron Grates Standard**
Complete System - Each Kit Includes:


- Specified number of 1 meter sections of trench drain
- Specified number of ductile iron slotted grates with Lock Bars and Bolts
- 1 - Solid End Caps and 1 - End Outlet

Key advantages of the ULG200 Polymer Concrete Kits:

- Polymer Concrete Channels
- Load Classes up to E Class
- Galvanized Edge
- External Width 7.3"
- Internal Width 5.9"
- Heights Between 6.7" - 12.5"


<p>Number</p> <p>R150Gxx Dimensions</p>	<p>Series</p> <p>ULG150 Trench Drain Channel MultiV150 - Galvanized Edge</p>
---	--

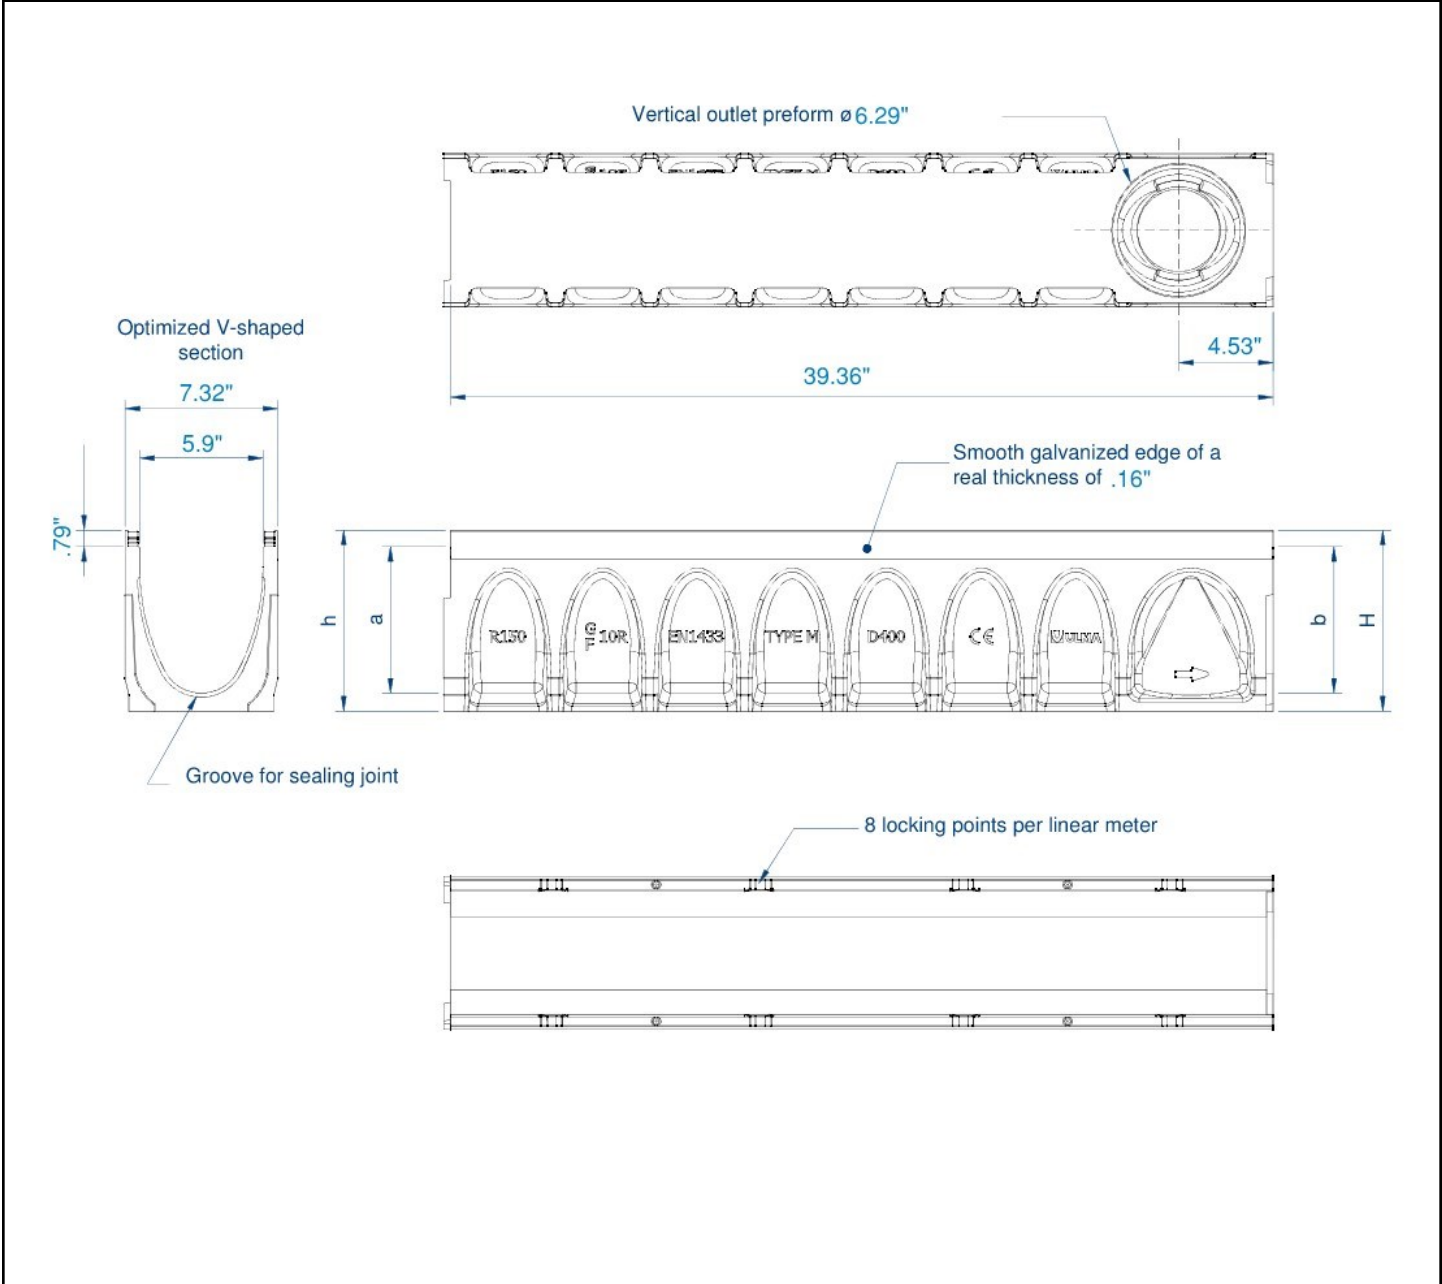


<p>Manufacturer</p> 	<p>Specification</p> <p><i>Description</i> ULMA polymer concrete linear drainage channel model multiV+® R150G. Self-cleaning optimized V-shaped V+ section. Protective galvanized steel edge with a real thickness of 2x2 mm, smooth, without breakage of the protective zinc layer, avoiding water accumulation and preventing corrosion. Boltless locking system ULMA Rapidlock®, 8 fixing points per 1m for higher mechanical stability. Load class up to D400, EN 1433 Standard. CE Conformity Declaration and compliance with EN 1433 Standard. External width 186 mm, internal width 150mm and total length 1000mm. Total external heights available between 170mm and 320mm. Installation possible with no slope, 0.5% prestoped, stepped fall or mixed slope.</p>
--	--

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

Number R150Gxx Dimensions	Series ULG150 Trench Drain Channel MultiV150 - Galvanized Edge
--	---



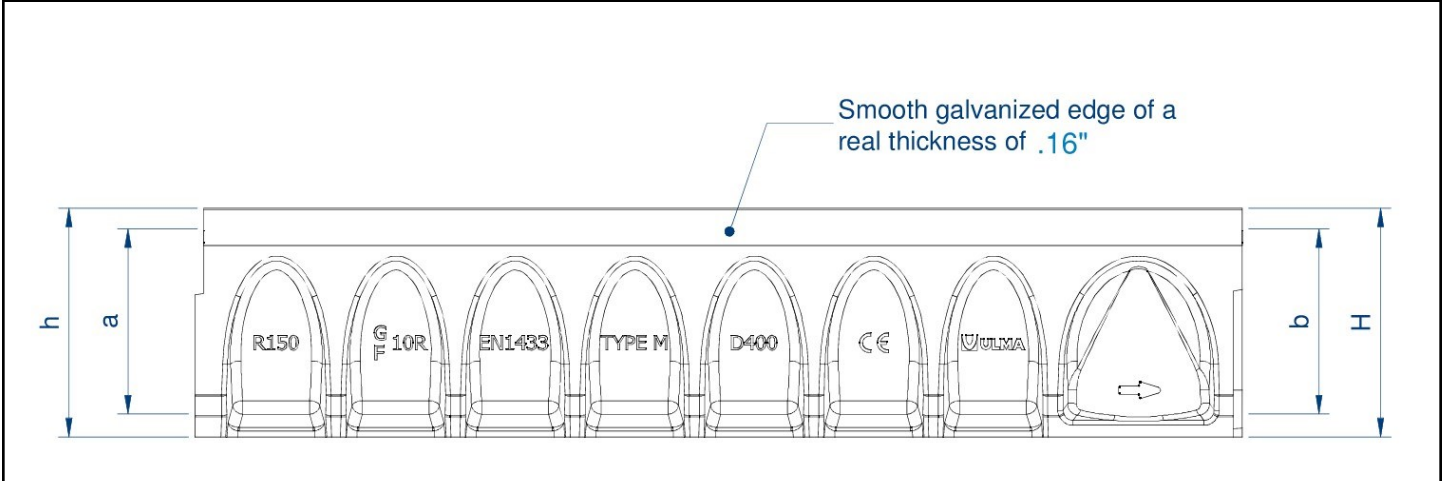


SPORT SYSTEM							
External width: 7.33"							
Internal width: 5.9"							
Length: 39.37"							
Channel Reference	Total Height (in)		Internal Height (in)		Hydraulic Section in. sq.	Outlet	
	h	H	A	B		Vertical	Horizontal
R150G00R	6.7	6.7	5.04	5.04	6.14	6.29	
R150G10R	8.7	8.7	7.01	7.01	8.58	6.29	
R150G11	8.7	8.9	7.01	7.2	8.88	6.29	
R150G12	8.9	9.1	7.2	7.4	9.13	6.29	
R150G13	9.1	9.3	7.4	7.6	9.37	6.29	
R150G14	9.3	9.4	7.6	7.8	9.63	6.29	
R150G15	9.4	9.6	7.8	7.99	9.88	6.29	
R150G16	9.6	9.8	7.99	8.2	10.14	6.29	
R150G17	9.8	10	8.2	8.4	10.39	6.29	
R150G18	10	10.2	8.4	8.6	10.63	6.29	
R150G19	10.2	10.4	8.6	8.8	10.89	6.29	
R150G20	10.4	10.6	8.8	8.98	11.14	6.29	
R150G20R	10.6	10.6	8.98	8.98	11.14	6.29	
R150G30R	12.5	12.5	10.9	10.9	13.78	6.29	

Manufacturer 	Specification <i>Description</i> ULMA polymer concrete linear drainage channel model multiV+® R150G. Self-cleaning optimized V-shaped V+ section. Protective galvanized steel edge with a real thickness of 2x2 mm, smooth, without breakage of the protective zinc layer, avoiding water accumulation and preventing corrosion. Boltless locking system ULMA Rapidlock®, 8 fixing points per 1m for higher mechanical stability. Load class up to D400, EN 1433 Standard. CE Conformity Declaration and compliance with EN 1433 Standard. External width 186 mm, internal width 150mm and total length 1000mm. Total external heights available between 170mm and 320mm. Installation possible with no slope, 0.5% prestoped, stepped fall or mixed slope.
--	---

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

Number R150GxxRM Dimensions	Series ULG150 Trench Drain Channel MultiV150 - Galvanized Edge
--	---

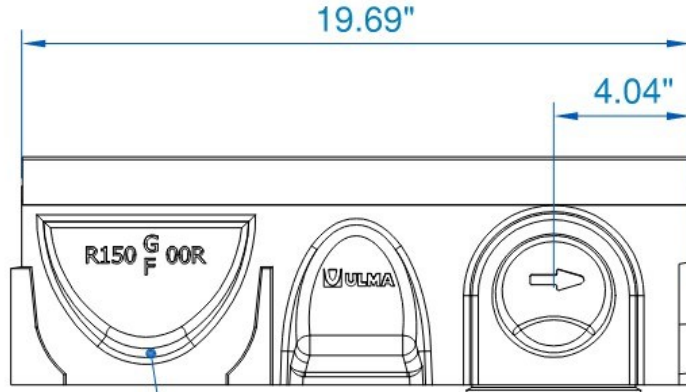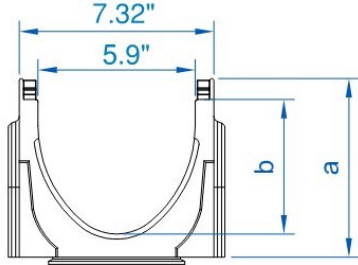

Lateral channel
connection preform

SPORT SYSTEM					
External width: 7.33"					
Internal width: 5.9"					
Length: 19.69"					
Channel Reference	Height (in)		Hydraulic Section in. sq.	Outlet	
	A	B		Vertical	Horizontal
R150G00RM	6.69	5.04	6.14	4.33	3.54
R150G10R	8.86	7.01	8.58	4.33	4.92

Manufacturer



Specification



ULMA polymer concrete linear drainage channel model MultiV+® R150GRM/RMJ. Self-cleaning optimized V-shaped V+ section.
 Protective galvanized steel edge with a real thickness of 2+2 mm, smooth, without breakage of the protective zinc layer, avoiding water accumulation and preventing corrosion.
 Boltless locking system ULMA Rapidlock®, 8 fixing points per lm for higher mechanical stability.
 Load class up to D400, EN 1433 Standard.
 Grooved to ease joint sealing and vertically and horizontally channel aligning tongue and groove.
 CE Conformity Declaration and compliance with EN 1433 Standard.
 External width 186mm, internal width 100mm and total length 500mm. Total heights available between 170mm and 220mm. Installation possible with no slope or stepped fall.
 Preformed knockouts with triple lipped seals for water tight connection(RMJ).


DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

<p>Number</p> <p style="text-align: center;">AR150G</p>	<p>Series</p> <p style="text-align: center;">MULTIV 150</p> <p style="text-align: center;">Galvanized edge Catch Basin</p>
---	--



PART NUMBER	DIMENSIONS
AR150G	19.69" [500MM]

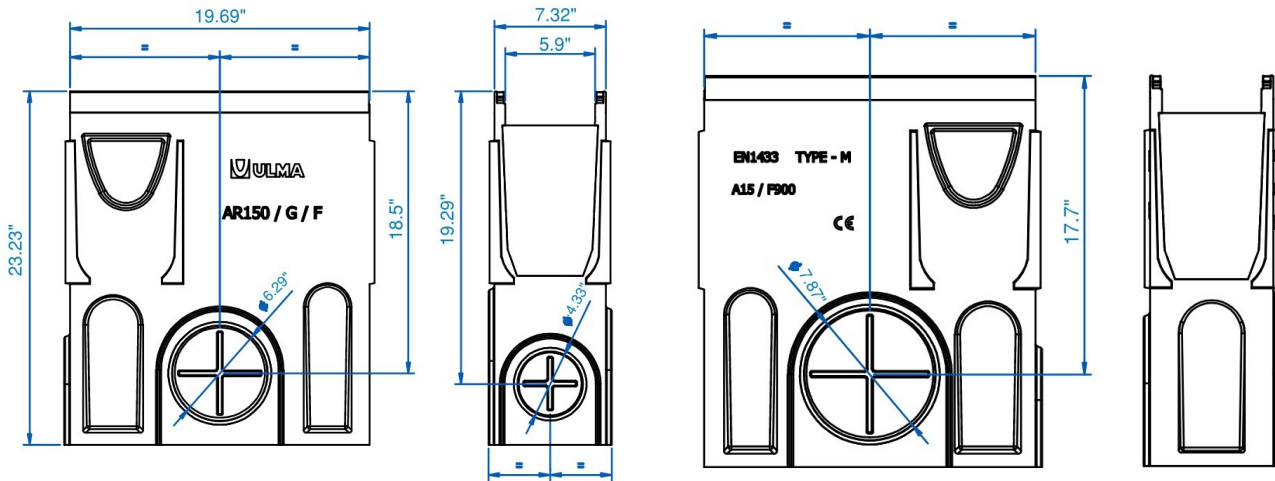

<p>Manufacturer</p> 	<p>Specification</p> <p>ULMA AR150G GALVANIZED EDGE POLYMER CONCRETE CATCH BASIN SUPPLIED BY TRENCH DRAIN SUPPLY</p>
--	---

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

Number MultiV150	Series MultiV150 End Caps and End Outlets
---------------------------------------	---



End Outlet	Min Height (in)	Max Height (in)
TR150xxA	4.33	6.29


Closed End Cap	Min Height (in)	Max Height (in)
TR150xxC	4.33	6.29



Concrete End Outlet	Min Height (in)	Max Height (in)
THPR150GxxAT	4.33	6.29

Concrete End Cap	Min Height (in)	Max Height (in)
THPR150GxxC	4.33	6.29



Manufacturer 	Specification ULMA MultiV150 Accessories SUPPLIED BY TRENCH DRAIN SUPPLY
--	---

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

1-877-903-7246


TRENCH DRAIN SUPPLY


www.trenchdrainsupply.com

Number <p style="text-align: center;">FNHX150RGDM</p>	Series <p style="text-align: center;">MULTIV 150 D Ductile Cast Iron Slotted</p>
--	---



PART NUMBER	DIMENSIONS	FREE AREA
FNHX150RGDM	19.6" [498MM]	51.35 SQ. IN.

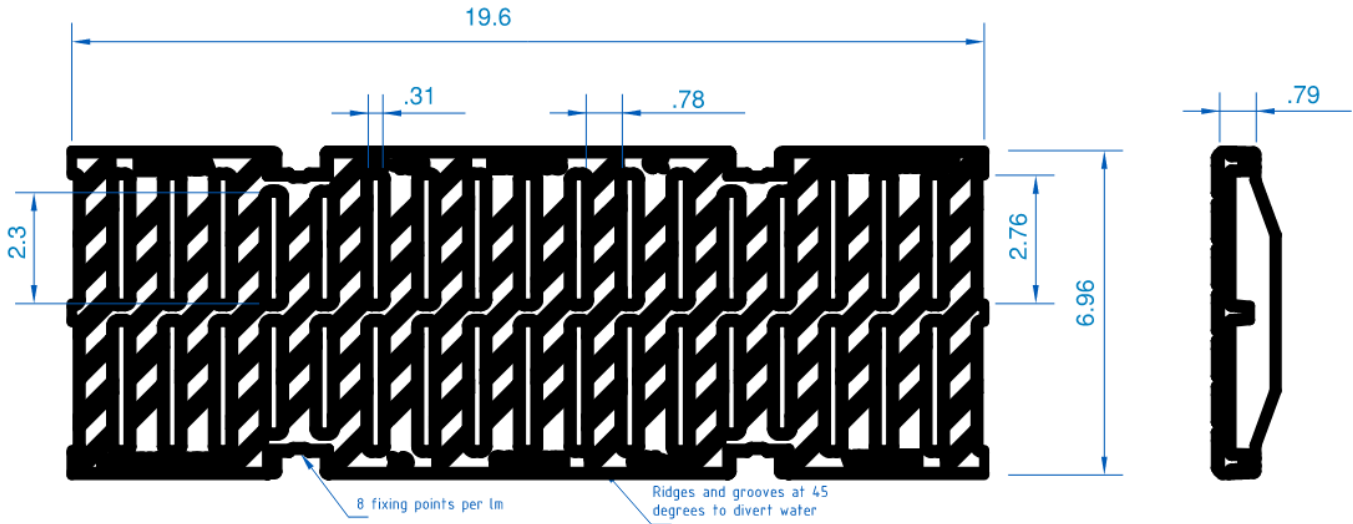

Manufacturer 	Specification <p>ULMA FNHX150RGDM DUCTILE CAST IRON ADA SLOTTED TRENCH DRAIN GRATE WITH CLASS D LOAD RATING (89,920 LBS.—3746 PSI), SUPPLIED BY TRENCH DRAIN SUPPLY</p>
--	---

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

1-877-903-7246



TRENCH DRAIN SUPPLY


www.trenchdrainsupply.com

Number FNX150RGEM	Series MULTIV 150 E Ductile Cast Iron Slotted
------------------------------------	---



PART NUMBER	DIMENSIONS	FREE AREA
FNX150RGEM	19.6" [498MM]	0 SQ. IN.

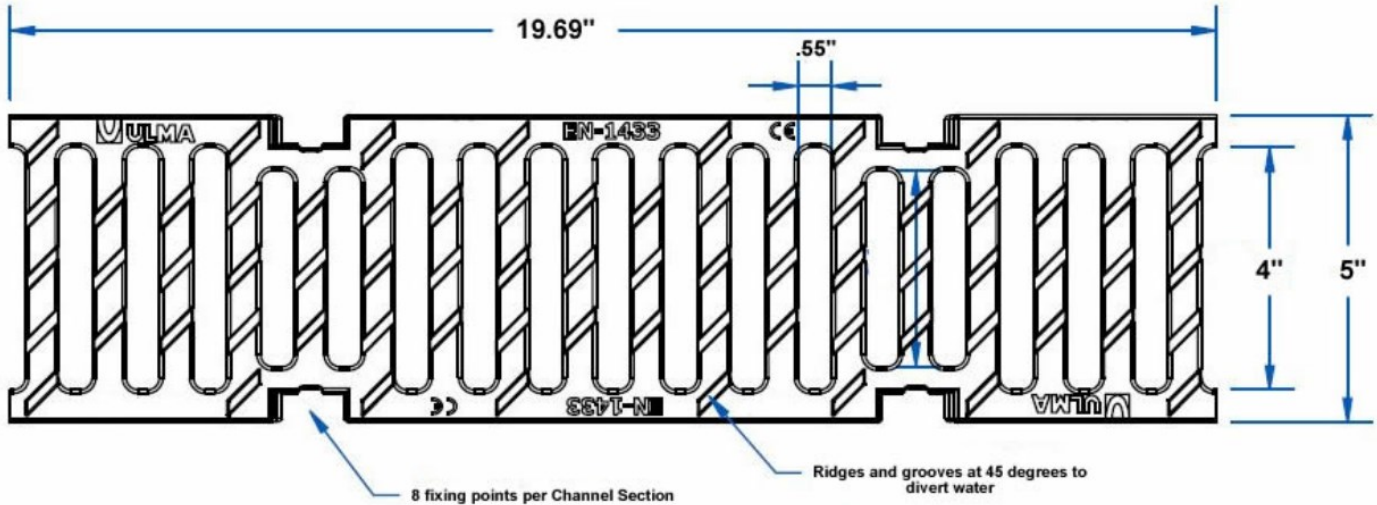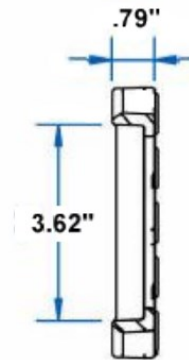

Manufacturer 	Specification ULMA FNX150RGEM DUCTILE CAST IRON SLOTTED TRENCH DRAIN GRATE WITH CLASS E LOAD RATING (136,800 LBS.—5700 PSI), SUPPLIED BY TRENCH DRAIN SUPPLY
--	--

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.