

**ULG200 Complete Kit**

Series

**ULG200**

Cover Sheet

ULG200

**8" Wide MultiV Galvanized Edge Concrete Trench Drain Kit 6 - 99 Foot Complete**

**New Commercial Trench Drain / Driveway Drain  
8 Inch Wide - E Class Ductile Iron Grates Standard**
**Complete System - Each Kit Includes:**

Specified number of 1 meter sections of trench drain  
 Specified number of ductile iron slotted grates with Lock Bars and Bolts  
 1 - Solid End Caps and 1 - 8" End Outlet

**Key advantages of the ULG200 Polymer Concrete Kits:**

- Polymer Concrete Channels
- Load Classes up to E Class
- Galvanized Edge
- External Width 9.3"
- Internal Width 7.9"
- Heights Between 6.7" - 14.6"

1-877-903-7246





www.trenchdrainsupply.com

Number			Series				
ULG200			MULTIV 200				
<div><p>With Ø200 PVC pipe</p><p>5.31</p><p>9.3</p><p>7.87</p><p>7.9</p><p>Smooth galvanized edge of a real thickness of .16</p><p>39.37</p><p>8 locking points per linear meter</p></div>							
Channel Reference	Total Height (in)		Internal Height (in)		Hydraulic Section in.	Outlet	
	h	H	A	B		Vertical	Horizontal
R200G000R	6.7	6.7	5.04	5.04	31.6	7.87	—
R200G00R	8.66	8.66	7.01	7.01	44.02	7.87	—
R200G01	8.66	8.86	7.01	7.2	45.65	7.87	—
R200G02	8.86	9.06	7.2	7.4	46.97	7.87	—
R200G03	9.06	9.25	7.4	7.6	48.21	7.87	—
R200G04	9.25	9.45	7.6	7.8	49.5	7.87	—
R200G05	9.45	9.65	7.8	8	50.7	7.87	—
R200G06	9.65	9.84	8	8.2	52	7.87	—
R200G07	9.84	10.04	8.2	8.4	53.24	7.87	—
R200G08	10.04	10.24	8.4	8.6	54.5	7.87	—
R200G09	10.24	10.43	8.6	8.8	55.8	7.87	—
R200G10	10.43	10.63	8.8	9	57.04	7.87	—
R200G10R	10.63	10.63	9	9	57.04	7.87	—
Manufacturer			Specification				
			ULMA ULG200 Polymer Concrete linear drainage channel GALVANIZED STEEL EDGE Load Class up to D400, EN 1433 Standard Vertically and Horizontally channel aligning tongue and groove joints				
DISCLAIMER - The customer and the customer’s architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.							

1-877-903-7246



www.trenchdrainsupply.com

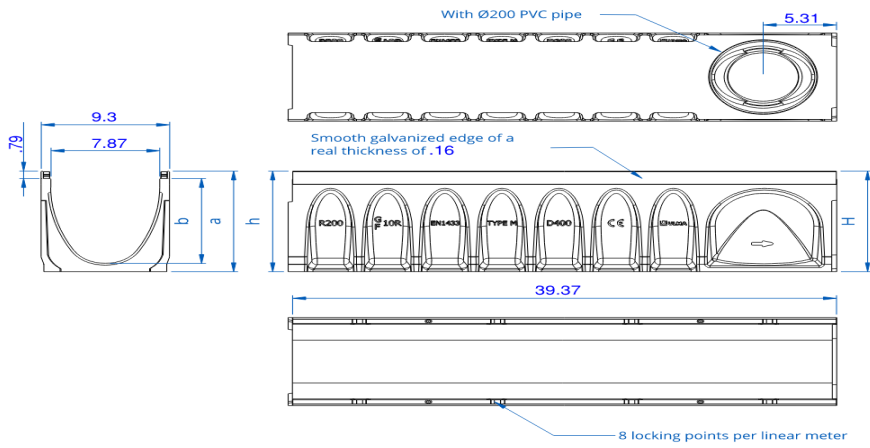
Number			Series				
ULG200			MULTIV 200				
<div></div>							
Channel Reference	Total Height (in)		Internal Height (in)		Hydraulic Section in. sq.	Outlet	
	h	H	A	B		Vertical	Horizontal
R200G11	10.63	10.83	9	9.2	60.22	7.87	—
R200G12	10.83	11.02	9.2	9.4	61.38	7.87	—
R200G13	11.02	11.22	9.4	9.6	62.62	7.87	—
R200G14	11.22	11.42	9.6	9.8	63.8	7.87	—
R200G15	11.42	11.62	9.8	10	65.02	7.87	—
R200G16	11.62	11.81	10	10.2	66.2	7.87	—
R200G17	11.81	12.01	10.2	10.4	67.43	7.87	—
R200G18	12.01	12.2	10.4	10.6	68.6	7.87	—
R200G19	12.2	12.4	10.6	10.8	69.83	7.87	—
R200G20	12.4	12.6	10.8	10.94	71	7.87	—
R200G20R	12.6	12.6	10.94	10.94	71	7.87	—
R200G30R	14.6	14.6	12.91	12.91	84.01	7.87	—
Manufacturer			Specification				
<div></div>			<div>ULMA ULG200 Polymer Concrete linear drainage channel GALVANIZED STEEL EDGE Load Class up to D400, EN 1433 Standard Vertically and Horizontally channel aligning tongue and groove joints</div>				
<div>DISCLAIMER - The customer and the customer’s architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.</div>							

1-877-903-7246



www.trenchdrainsupply.com

Number	Series
<b>R200GH</b>	<b>MULTIV 200</b>

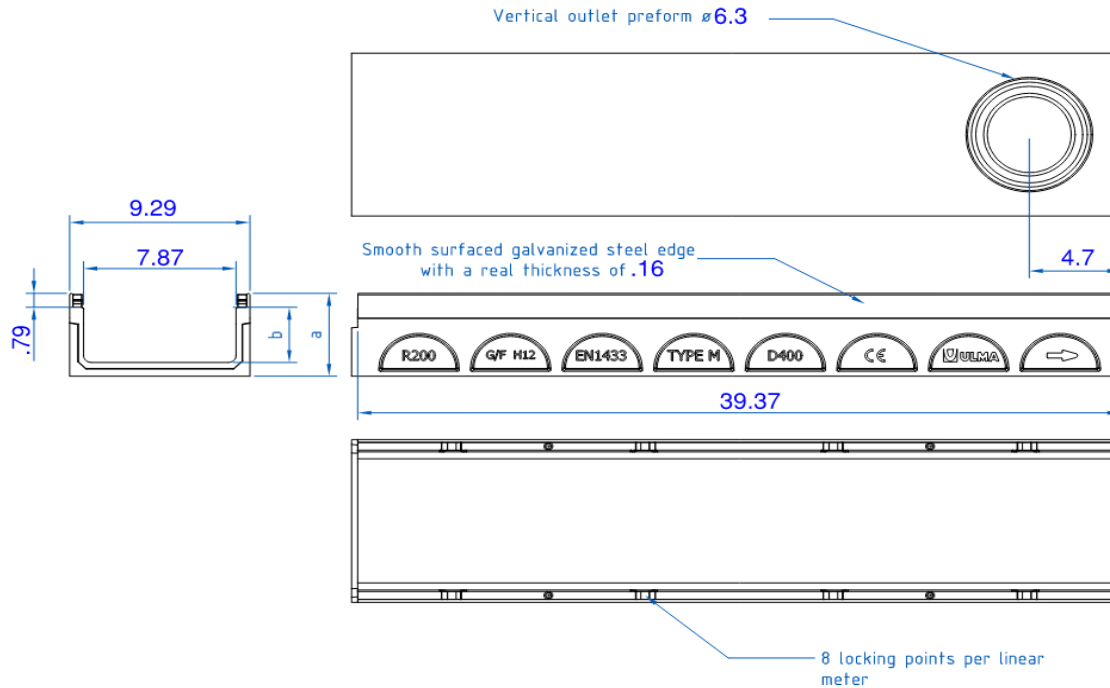

#### SPORT SYSTEM

External width: 9.3"

Internal width: 7.87"

Length: 39.37"

Channel Reference	Height (in)		Hydraulic Section in. sq.	Outlet	
	A	B		Vertical	Horizontal
R200GH8	3.14	1.5	12.25	6.3	—
R200GH12	4.72	3.07	24.65	6.3	—

#### Manufacturer



#### Specification

ULMA R200GH Polymer Concrete linear drainage channel  
 GALVANIZED STEEL EDGE  
 Load Class up to D400, EN 1433 Standard  
 Vertically and Horizontally channel aligning tongue and groove joints

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

1-877-903-7246





www.trenchdrainsupply.com

Number	Series
<b>AR200G</b>	<b>MULTIV 200</b> Galvanized edge Catch Basin



PART NUMBER	DIMENSIONS
AR200G	21.7" [560MM]

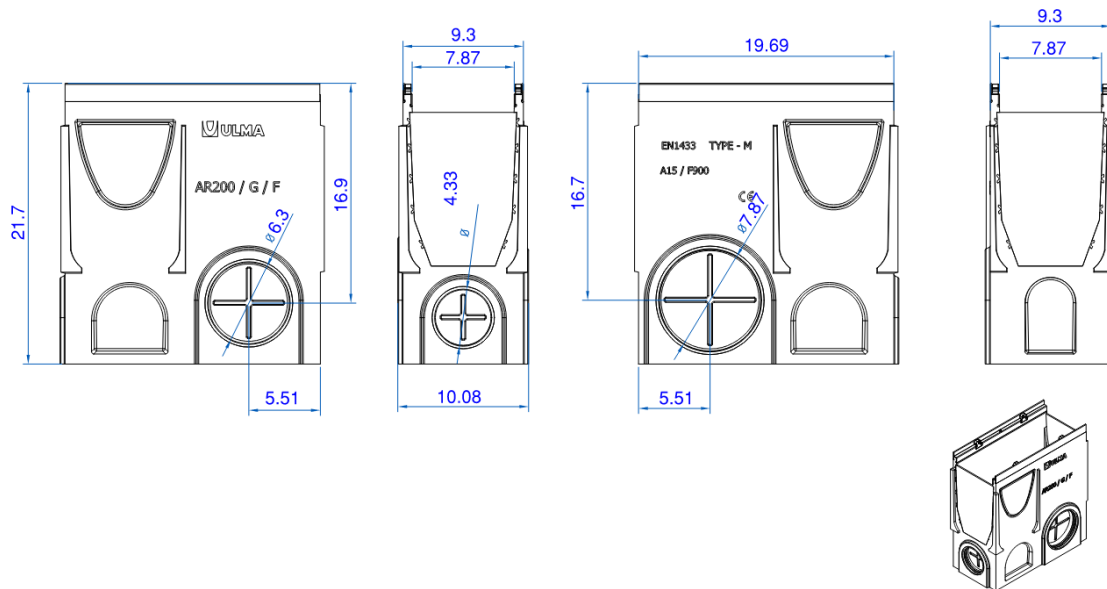






Manufacturer	Specification
	<b>ULMA AR200G GALVANIZED EDGE POLYMER CONCRETE CATCH BASIN</b> <b>SUPPLIED BY TRENCH DRAIN SUPPLY</b>

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

1-877-903-7246



www.trenchdrainsupply.com

<div>Number</div> <div>MultiV200</div>	<div>Series</div> <div>MultiV200</div> <div>End Caps and Installation Device</div>																			
<div><div></div><table><tr><th>End Outlet</th><th>Min Height (in)</th><th>Max Height (in)</th></tr><tr><td>TUNIR200GC-xx</td><td>6.7</td><td>14.6</td></tr></table></div> <div><div></div><table><tr><th>Closed End cap</th><th>Min Height (in)</th><th>Max Height (in)</th></tr><tr><td>TUNIR200GA-xx</td><td>6.7</td><td>14.6</td></tr></table></div> <div><div></div><table><tr><th>Composite End Cap</th><th>Min Height (in)</th><th>Max Height (in)</th></tr><tr><td>TUNIR200</td><td>6.7</td><td>14.6</td></tr></table></div> <div><div></div><div><div>ID200</div><div>Installation device for the MultiV200 Series trench drains</div></div></div>			End Outlet	Min Height (in)	Max Height (in)	TUNIR200GC-xx	6.7	14.6	Closed End cap	Min Height (in)	Max Height (in)	TUNIR200GA-xx	6.7	14.6	Composite End Cap	Min Height (in)	Max Height (in)	TUNIR200	6.7	14.6
End Outlet	Min Height (in)	Max Height (in)																		
TUNIR200GC-xx	6.7	14.6																		
Closed End cap	Min Height (in)	Max Height (in)																		
TUNIR200GA-xx	6.7	14.6																		
Composite End Cap	Min Height (in)	Max Height (in)																		
TUNIR200	6.7	14.6																		
<div>Manufacturer</div> <div></div>	<div>Specification</div> <div>ULMA MultiV200 Accessories</div> <div>SUPPLIED BY TRENCH DRAIN SUPPLY</div>																			
<div>DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.</div>																				



1-877-903-7246




www.trenchdrainsupply.com

Number	Series
<b>ULMA FNX200RGEM</b>	<b>MULTIV 200</b>



<u>PART NUMBER</u>	<u>DIMENSIONS</u>	<u>FREE AREA</u>
FNX200RGEM	19.6" [498MM]	122.45 SQ. IN.

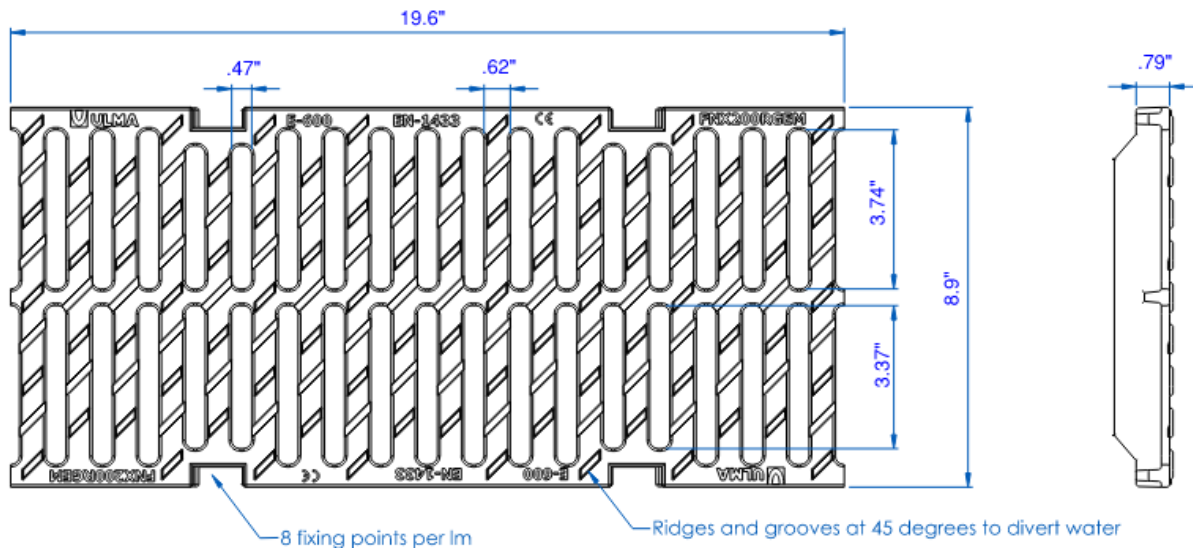

Manufacturer	Specification
	<p>ULMA FNX200RGEM DUCTILE IRON SLOTTED TRENCH DRAIN GRATE WITH CLASS E LOAD RATING (135,000 LBS.)</p> <p>SUPPLIED BY TRENCH DRAIN SUPPLY</p>


DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

1-877-903-7246





www.trenchdrainsupply.com

Number <b>FNLHX200RGD/EM</b>	Series <b>MULTIV 200</b> D/E Ductile Cast Iron Slotted
---------------------------------	--

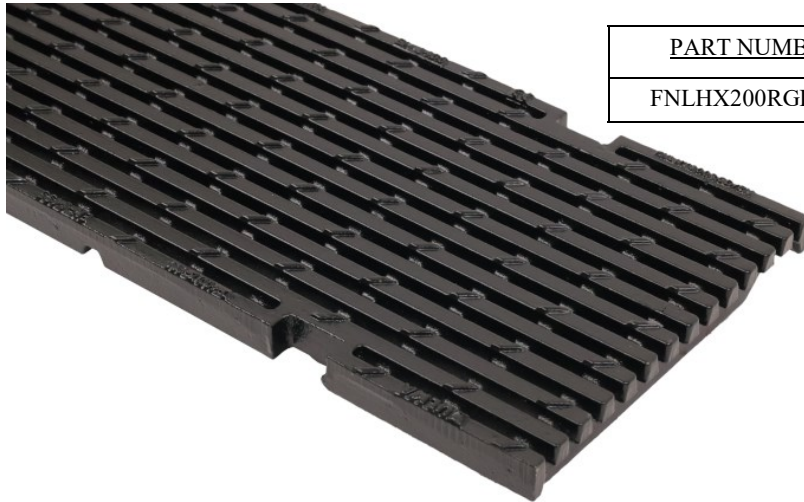

PART NUMBER	DIMENSIONS	FREE AREA
FNLHX200RGD/EM	19.6" [498MM]	111.7 SQ. IN.

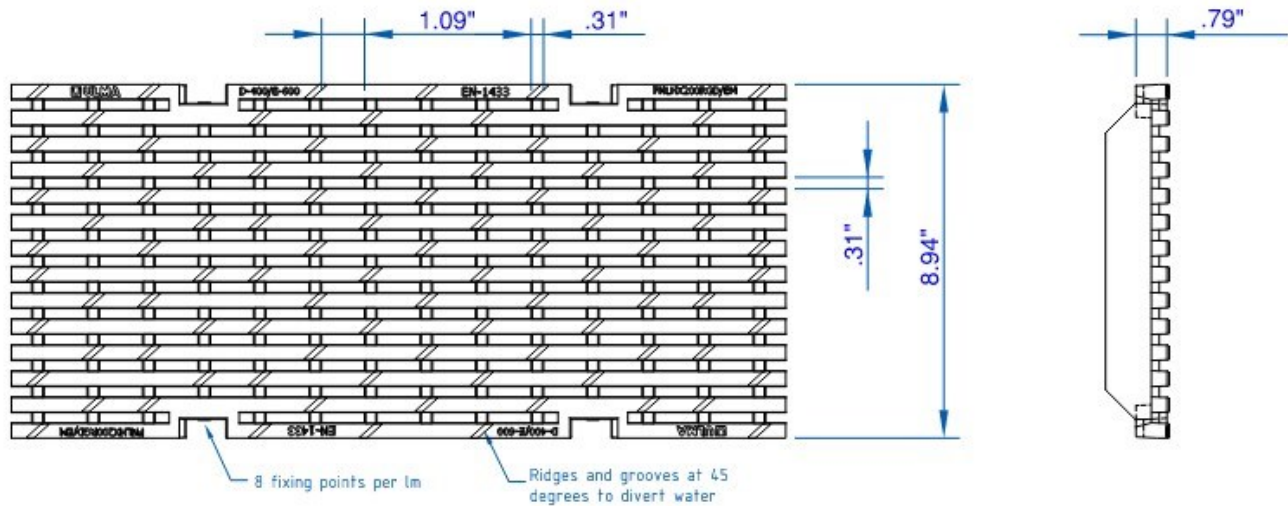

<b>Manufacturer</b>  	<b>Specification</b>  ULMA FNLHX200RGD/EM DUCTILE CAST IRON SLOTTED TRENCH DRAIN GRATE WITH CLASS D LOAD RATING (89,920 LBS.—3746 PSI) OR CLASS E LOAD RATING (136,800 LBS — 5700 PSI). SUPPLIED BY TRENCH DRAIN SUPPLY
--	---

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.



1-877-903-7246





www.trenchdrainsupply.com

Number <b>FNHX200RGDM</b>	Series <b>MULTIV 200</b> D Ductile Cast Iron Slotted
------------------------------	--



PART NUMBER	DIMENSIONS	FREE AREA
FNHX200RGDM	19.6" [498MM]	0 SQ. IN.

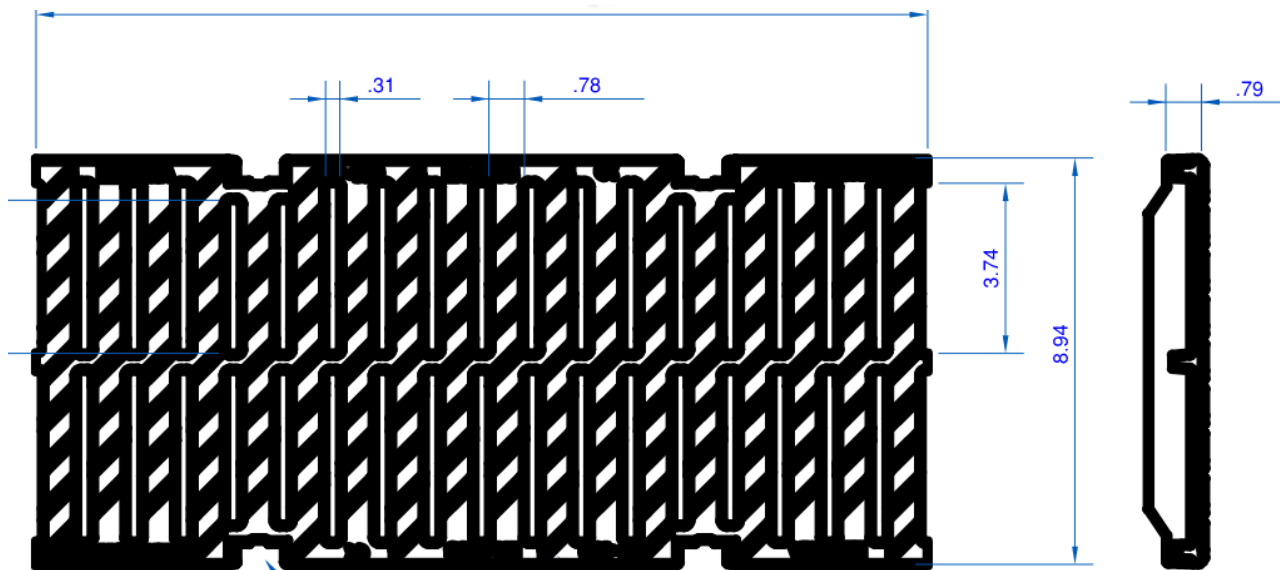

Manufacturer  	Specification  ULMA FNHX200RGDM DUCTILE CAST IRON SLOTTED TRENCH DRAIN GRATE WITH CLASS D LOAD RATING (89,920 LBS.—3746 PSI), SUPPLIED BY TRENCH DRAIN SUPPLY
---	--

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

1-877-903-7246



www.trenchdrainsupply.com

Number

**GEHX200RGC**


Series

**MULTIV 200**

C Galvanized Steel Mesh



<u>PART NUMBER</u>	<u>DIMENSIONS</u>	<u>FREE AREA</u>
GEHX200RGC	39.3" [998MM]	225.22 SQ. IN.

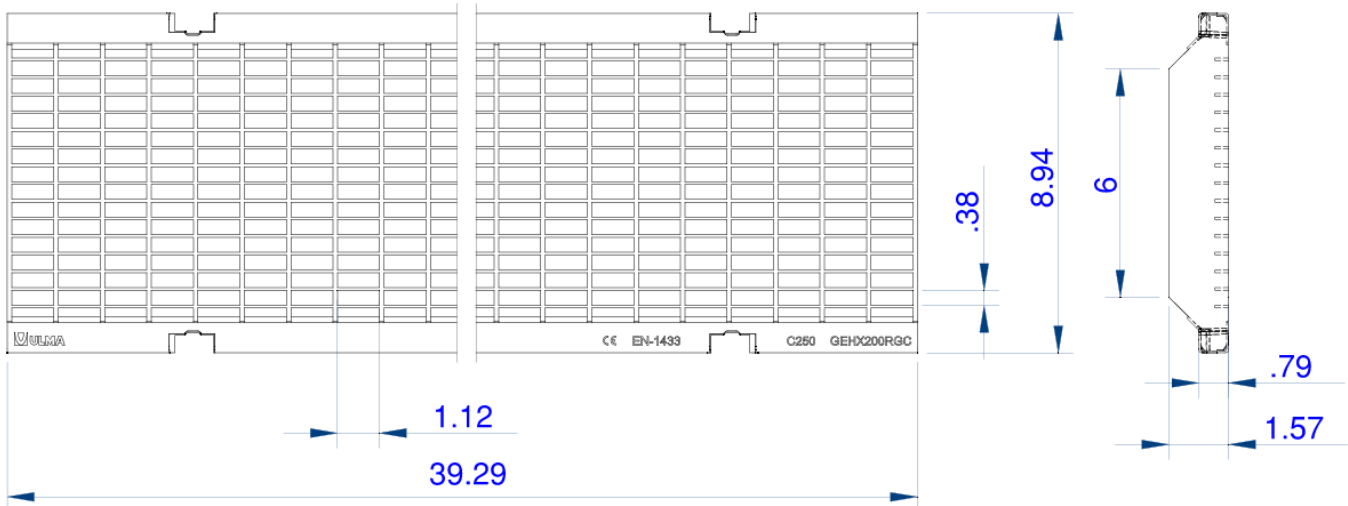

Manufacturer



Specification

ULMA GEHX200RGC GALVANIZED STEEL MESH TRENCH DRAIN GRATE WITH CLASS C LOAD RATING (56,200 LBS.—2341PSI), SUPPLIED BY TRENCH DRAIN SUPPLY

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.