



<p>Number</p> <p>R100GXxx</p>	<p>Series</p> <p>ULS100</p> <p>Trench Drain Channel MultiV100 - Stainless Steel Edge</p>
---	--



Optimized V-shaped section




Vertical outlet preform \varnothing 4 3/8"

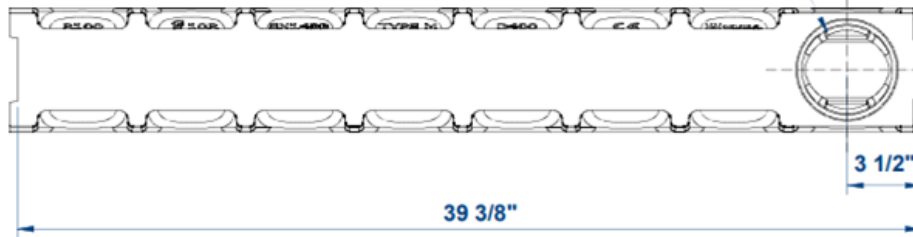


Groove for sealing joint

Smooth stainless edge of a real thickness of .0787" + .0787"

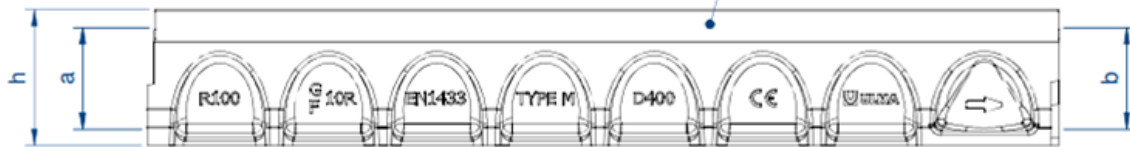

8 locking points per linear meter



<p>Manufacturer</p> 	<p>Specification</p> <p>ULMA Linear Drainage Channel, type MULTIV+ R100G; Ext width 5 3/8" mm, Internal width 4" with overall heights between 4" and 11"; suitable for cascade-type slopes to collect rainwater; sections 39 3/8" length; optimized V-shape with self-cleaning effect; stainless steel edges for lateral protection; Rapidlock® boltless system.</p>
--	---

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

Number R100GXxx Dimensions	Series ULS100 Trench Drain Channel MultiV100 - Stainless Steel Edge
---	--



FAST, BOLTLESS SAFETY
LOCKING 8 fastening points
per linear meter.

rapidlock®

Manufacturer



MULTIV+100

Channel reference:	Total height		Internal height		Hydraulic section (in ²)	Ø outlet(mm)	
	h (in)	H (in)	a (in)	b (in)		Vert.	Horiz.
R100G00R	3.94	3.94	2.44	2.44	08.68	110	-
R100G01	3.94	4.13	2.44	2.63	09.44	110	-
R100G02	4.13	4.33	2.63	2.83	09.97	110	-
R100G03	4.33	4.53	2.83	3.03	10.49	110	-
R100G04	4.53	4.72	3.03	3.23	11.02	110	-
R100G05	4.72	4.92	3.23	3.43	11.55	110	-
R100G06	4.92	5.12	3.43	3.62	12.07	110	-
R100G07	5.12	5.31	3.62	3.82	12.60	110	-
R100G08	5.31	5.51	3.82	4.02	13.13	110	-
R100G09	5.51	5.71	4.02	4.21	13.66	110	-
R100G10	5.71	5.91	4.21	4.41	14.18	110	-
R100G10R	5.91	5.91	4.41	4.41	14.18	110	-
R100G11	5.91	6.10	4.41	4.61	14.96	110	-
R100G12	6.10	6.30	4.61	4.80	15.59	110	-
R100G13	6.30	6.49	4.80	5.00	16.21	110	-
R100G14	6.49	6.69	5.00	5.20	16.85	110	-
R100G15	6.69	6.89	5.20	5.39	17.47	110	-
R100G16	6.89	7.09	5.39	5.59	18.11	110	-
R100G17	7.09	7.28	5.59	5.79	18.72	110	-
R100G18	7.28	7.48	5.79	5.98	19.69	110	-
R100G19	7.48	7.68	5.98	6.18	19.98	110	-
R100G20	7.68	7.87	6.18	6.38	20.62	110	-
R100G20R	7.87	7.87	6.38	6.38	20.62	110	-
R100G21	7.87	8.07	6.38	6.58	21.28	110	-
R100G22	8.07	8.27	6.58	6.77	21.95	110	-
R100G23	8.27	8.46	6.77	6.97	22.61	110	-
R100G24	8.46	8.66	6.97	7.16	23.28	110	-
R100G25	8.66	8.86	7.16	7.37	23.95	110	-
R100G26	8.86	9.06	7.37	7.56	24.61	110	-
R100G27	9.06	9.25	7.56	7.76	25.28	110	-
R100G28	9.25	9.45	7.76	7.95	25.95	110	-
R100G29	9.45	9.65	7.95	8.15	26.61	110	-
R100G30	9.65	9.84	8.15	8.35	27.78	110	-
R100G30R	9.84	9.84	8.35	8.35	27.78	110	-
R100G40R	11.81	11.81	10.31	10.31	34.10	110	-

Manufacturer



Specification

ULMA Linear Drainage Channel, type MULTIV+ R100G; Ext width 5 3/8" mm, Internal width 4" with overall heights between 4" and 11"; suitable for cascade-type slopes to collect rainwater; sections 39 3/8" length; optimized V-shape with self-cleaning effect; stainless steel edges for lateral protection; Rapidlock® boltless system.

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.