


ULS100 Complete Kit

Series

ULS100
Cover Sheet

4" Wide Polymer Concrete Trench Drain Kit 3 - 99 Foot Complete

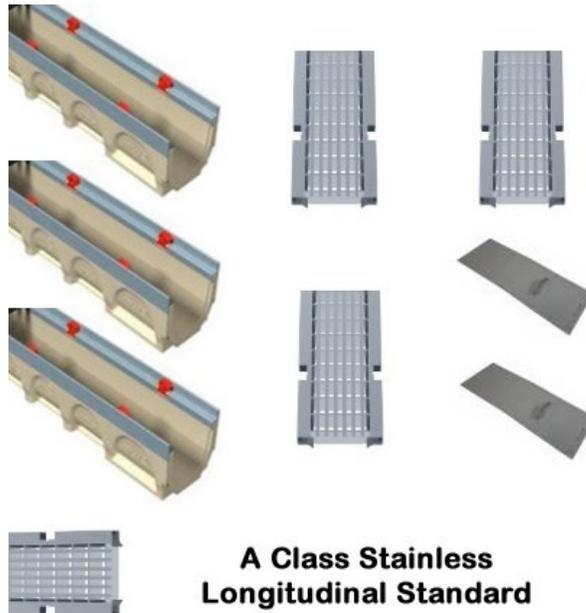

**Polymer Concrete Sloped Trench Drain Kit
Integrated Stainless Steel Edge**

Complete Kit Includes:

Specified number of 1 meter sections of trench drain

Specified number of stainless steel slotted grates (A Class Stainless Slotted Standard) with integrated locks

2 - HDPE End Cap/Outlet(s)

Number MultiV100	Series MultiV100 End Cap and Installation Device
---------------------------------------	--



Composite End Cap	Min Height (in)	Max Height (in)
TUNIR100	3.94	11.81

ID100

Installation device for the MultiV100 Series trench drains




Manufacturer 	Specification ULMA MultiV100 Stainless Edge Accessories SUPPLIED BY TRENCH DRAIN SUPPLY
--	--

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.


<p>Number</p> <p>R100GXxx</p>	<p>Series</p> <p>ULS100</p> <p>Trench Drain Channel MultiV100 - Stainless Steel Edge</p>
---	--



Optimized V-shaped section

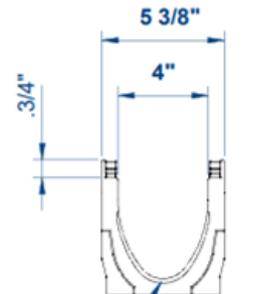


Vertical outlet preform \varnothing 4 3/8"

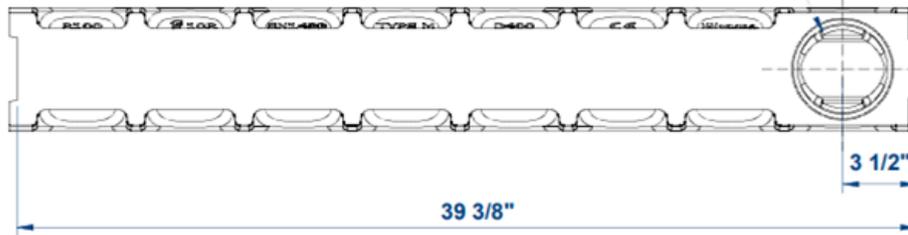

Groove for sealing joint

Smooth stainless edge of a real thickness of .0787" + .0787"

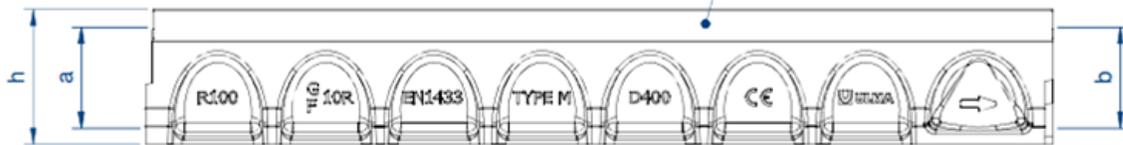

8 locking points per linear meter



<p>Manufacturer</p> 	<p>Specification</p> <p>ULMA Linear Drainage Channel, type MULTIV+ R100G; Ext width 5 3/8" mm, Internal width 4" with overall heights between 4" and 11"; suitable for cascade-type slopes to collect rainwater; sections 39 3/8" length; optimized V-shape with self-cleaning effect; stainless steel edges for lateral protection; Rapidlock® boltless system.</p>
--	---

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

<p>Number</p> <p style="text-align: center;">R100GXxx Dimensions</p>	<p>Series ULS100</p> <p style="text-align: center;">Trench Drain Channel</p> <p style="text-align: center;">MultiV100 - Stainless Steel Edge</p>
--	--



FAST, BOLTLESS SAFETY
LOCKING 8 fastening points
per linear meter.

rapidlock®

Manufacturer



MULTIV+100

Channel reference:	Total height		Internal height		Hydraulic section (in ²)	Ø outlet(mm)	
	h (in)	H (in)	a (in)	b (in)		Vert.	Horiz.
R100G00R	3.94	3.94	2.44	2.44	08.68	110	-
R100G01	3.94	4.13	2.44	2.63	09.44	110	-
R100G02	4.13	4.33	2.63	2.83	09.97	110	-
R100G03	4.33	4.53	2.83	3.03	10.49	110	-
R100G04	4.53	4.72	3.03	3.23	11.02	110	-
R100G05	4.72	4.92	3.23	3.43	11.55	110	-
R100G06	4.92	5.12	3.43	3.62	12.07	110	-
R100G07	5.12	5.31	3.62	3.82	12.60	110	-
R100G08	5.31	5.51	3.82	4.02	13.13	110	-
R100G09	5.51	5.71	4.02	4.21	13.66	110	-
R100G10	5.71	5.91	4.21	4.41	14.18	110	-
R100G10R	5.91	5.91	4.41	4.41	14.18	110	-
R100G11	5.91	6.10	4.41	4.61	14.96	110	-
R100G12	6.10	6.30	4.61	4.80	15.59	110	-
R100G13	6.30	6.49	4.80	5.00	16.21	110	-
R100G14	6.49	6.69	5.00	5.20	16.85	110	-
R100G15	6.69	6.89	5.20	5.39	17.47	110	-
R100G16	6.89	7.09	5.39	5.59	18.11	110	-
R100G17	7.09	7.28	5.59	5.79	18.72	110	-
R100G18	7.28	7.48	5.79	5.98	19.69	110	-
R100G19	7.48	7.68	5.98	6.18	19.98	110	-
R100G20	7.68	7.87	6.18	6.38	20.62	110	-
R100G20R	7.87	7.87	6.38	6.38	20.62	110	-
R100G21	7.87	8.07	6.38	6.58	21.28	110	-
R100G22	8.07	8.27	6.58	6.77	21.95	110	-
R100G23	8.27	8.46	6.77	6.97	22.61	110	-
R100G24	8.46	8.66	6.97	7.16	23.28	110	-
R100G25	8.66	8.86	7.16	7.37	23.95	110	-
R100G26	8.86	9.06	7.37	7.56	24.61	110	-
R100G27	9.06	9.25	7.56	7.76	25.28	110	-
R100G28	9.25	9.45	7.76	7.95	25.95	110	-
R100G29	9.45	9.65	7.95	8.15	26.61	110	-
R100G30	9.65	9.84	8.15	8.35	27.78	110	-
R100G30R	9.84	9.84	8.35	8.35	27.78	110	-
R100G40R	11.81	11.81	10.31	10.31	34.10	110	-

Manufacturer



Specification

ULMA Linear Drainage Channel, type MULTIV+ R100G; Ext width 5 3/8" mm, Internal width 4" with overall heights between 4" and 11"; suitable for cascade-type slopes to collect rainwater; sections 39 3/8" length; optimized V-shape with self-cleaning effect; stainless steel edges for lateral protection; Rapidlock® boltless system.


DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

1-877-903-7246



www.trenchdrainsupply.com

Number INLHX100RGA	Series MultiV100 A Class Stainless ADA Slotted Grate
-------------------------------------	--

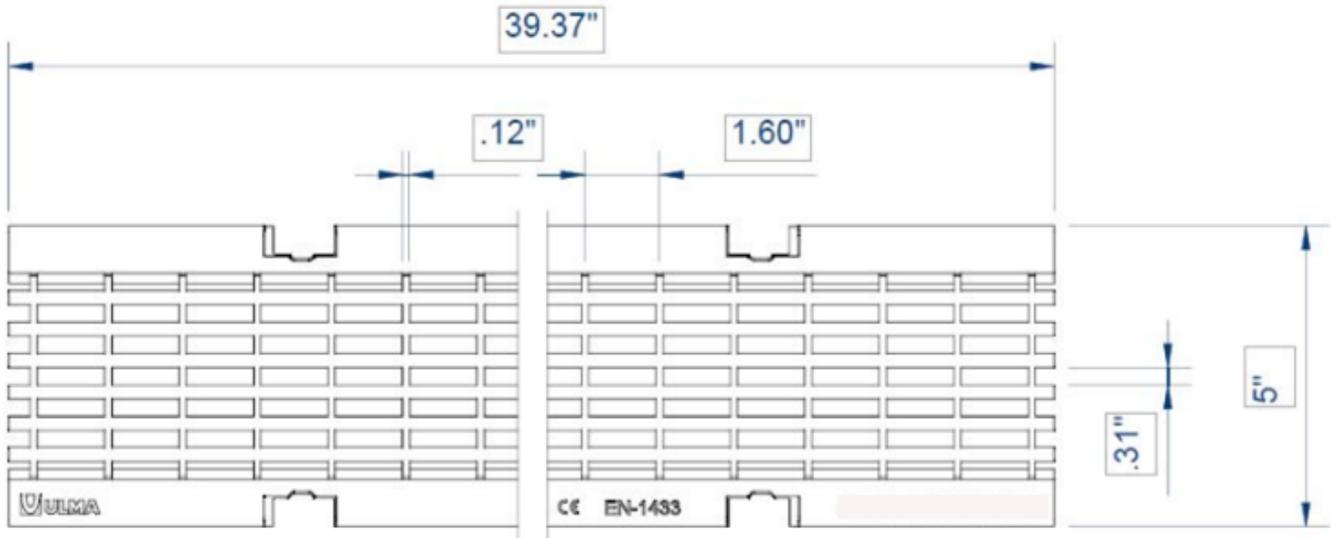

Manufacturer 	Specification ULMA INLHX100RGA STAINLESS STEEL ADA SLOTTED TRENCH DRAIN GRATE WITH CLASS A LOAD RATING (3,372LBS/FT), SUPPLIED BY TRENCH DRAIN SUPPLY
-------------------------	---


DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

1-877-903-7246



www.trenchdrainsupply.com

Number INLHX100RGC	Series MultiV100 C Class Stainless ADA Slotted Grate
-------------------------------------	--

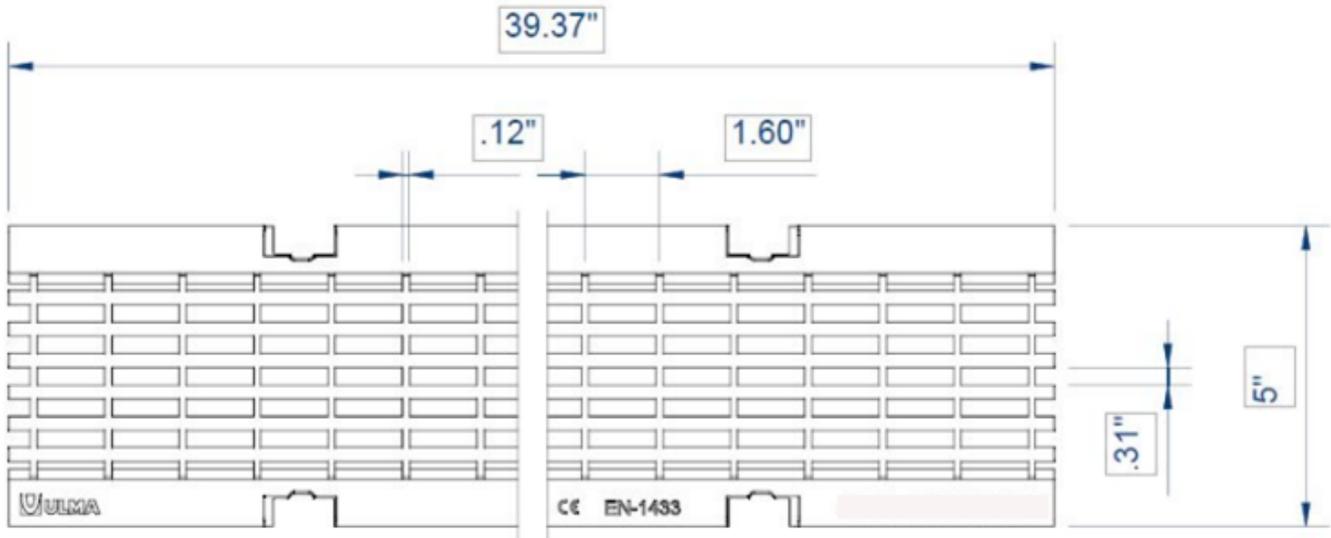

Manufacturer 	Specification ULMA INLHX100RGC STAINLESS STEEL ADA SLOTTED TRENCH DRAIN GRATE WITH CLASS C LOAD RATING (56,200 LBS/FT), SUPPLIED BY TRENCH DRAIN SUPPLY
-------------------------	---



DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

1-877-903-7246

Number PNH100RGCM	Series MULTIV 100 C Composite ADA Slotted Grate
------------------------------------	---



C Class

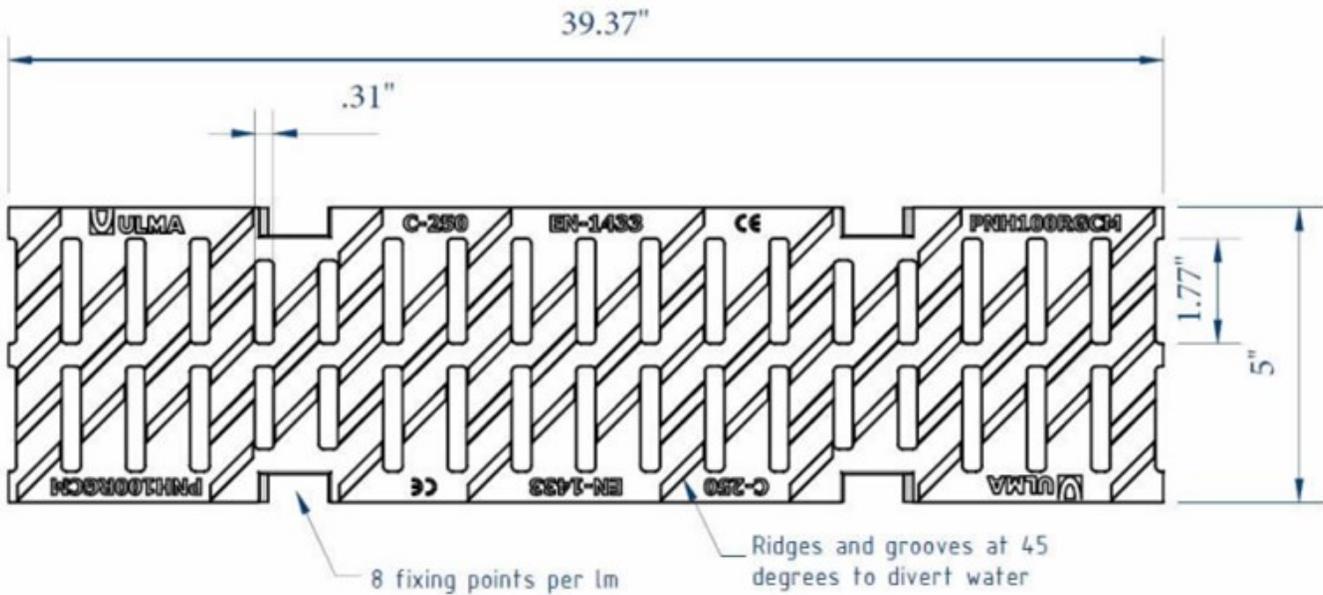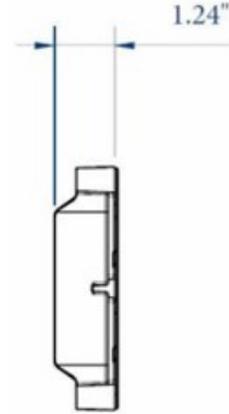

Manufacturer 	Specification ULMA PNH100RGCM COMPOSITE ADA SLOTTED TRENCH DRAIN GRATE WITH CLASS C LOAD RATING (56,200 LBS./FT), SUPPLIED BY TRENCH DRAIN SUPPLY
--	---

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.