


<b>Number</b>	<b>Series</b>
<b>94325</b>	<b>Z882-GHPDE</b> E Class Galvanized Ductile Iron Grate P12-GHPDE

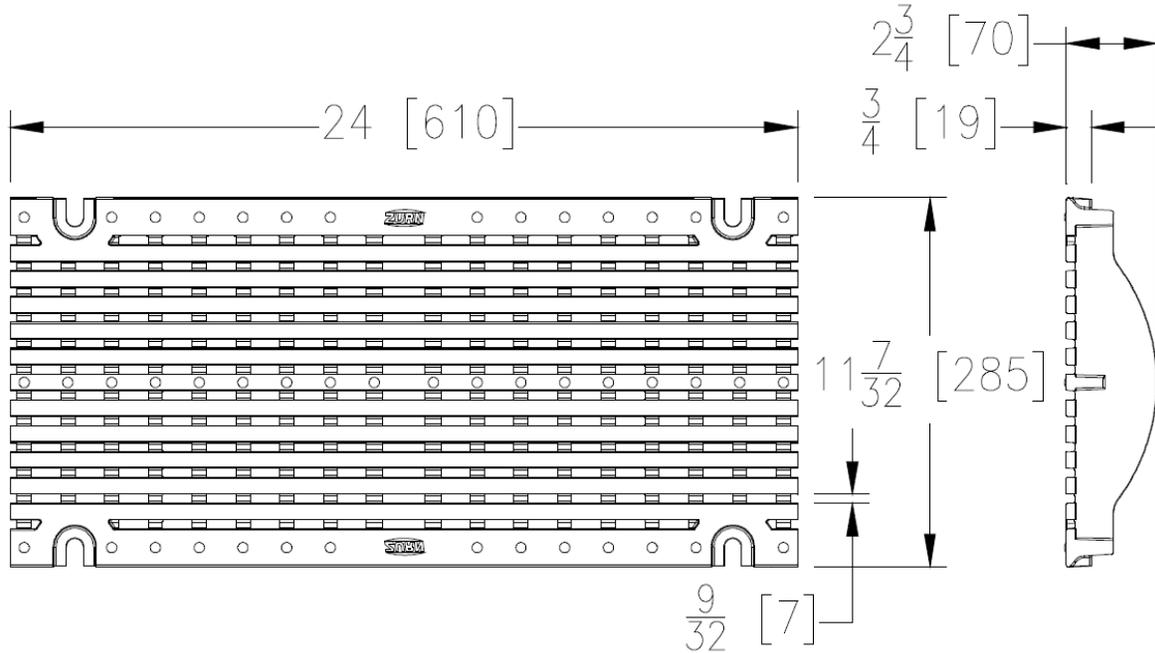

**Specification**

The Zurn P12-GHPDE Heel-Proof Longitudinal, Galvanized Ductile Iron Grate, is 11-1/4 inches wide by 24 inches long, weighing 29.6 lbs per linear foot. The grate has an open area of 29.9 square inches per linear foot, DIN Rating of E, ANSI Rating of Special-Duty, ADA compliant, H-20 Load Rated and FAA Load Rated. Galvanizing (hot dip) conforms to ASTM specification A123. Supplied by Trench Drain Supply.

<b>GHPDE - Galvanized Heel-Proof</b>	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	29.6 lbs/ft.
Open Area:	29.9 in <sup>2</sup> /ft.
ANSI Rating:	Special-Duty
Application:	Heel-Proof, Forklifts, Commercial Aircraft
Slot Width/Hole Size:	9/32"
ADA:	Yes
H-20:	Yes
FAA:	Yes

**Manufacturer**



DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.