


<b>Number</b>  <p style="text-align: center;"><b>308341</b></p>	<b>Series</b> <p style="text-align: center;"><b>Z886-RPGRC</b> C Class Reinforced Galvanized Steel Grate P6-RPGRC</p>
---	--

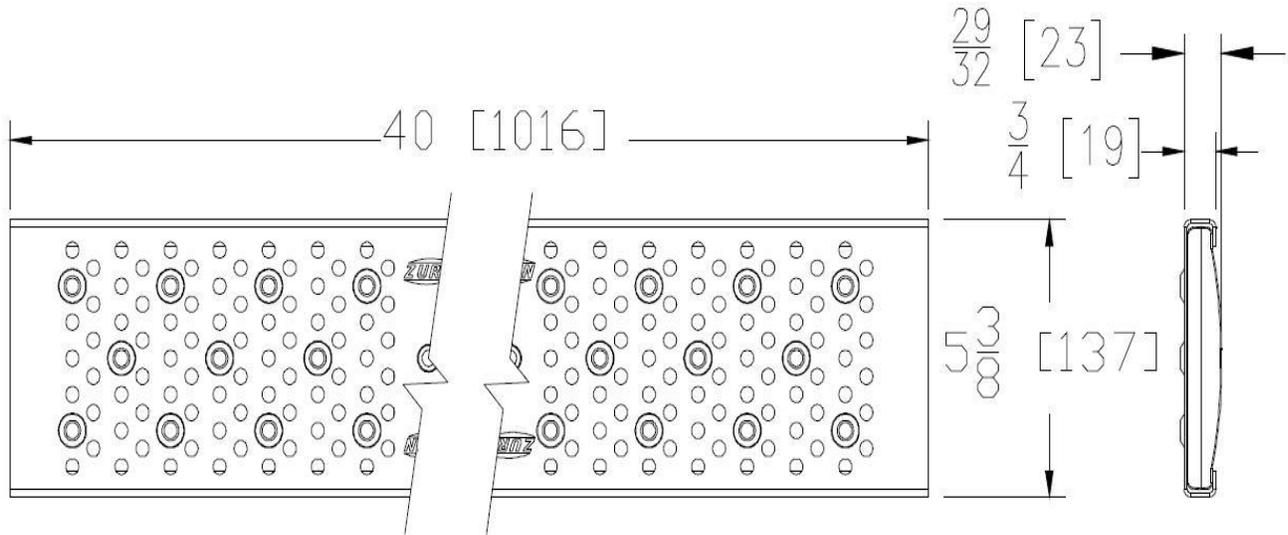

**Specification**

The Zurn P6-RPGRC Reinforced Perforated Reverse Punch, Galvanized Steel Grate, is 5-3/8 inches wide by 40 inches long, weighing 4.7 lbs per linear foot. The Grate has an open area of 8.3 square inches per linear foot, DIN Rating of C, ANSI Rating of Heavy-Duty, ADA Compliant, H-20 Load Rated. Galvanized Sheet conforms to ASTM Specification A653, Galvanized coating designation G60, minimum spangle. Hot Dip Galvanizing on Reinforcement conforms to ASTM Specification A123. Supplied by Trench Drain Supply.

<b>RPGRC - Reinforced Perforated Reverse Punch</b>	
Material: Galvanized Steel & Galvanized Ductile Iron	
DIN Rating:	Class C
Weight:	4.7 lbs/ft.
Open Area:	8.3 in <sup>2</sup> /ft.
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	5/16"
ADA:	Yes
H-20:	Yes
FAA:	No

**Manufacturer**



DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.