



Z893

**STAINLESS STEEL FLOOR RECEPTOR
W/ BAR GRATE**




Supplied By:

877-903-7246
www.trenchdrainsupply.com

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

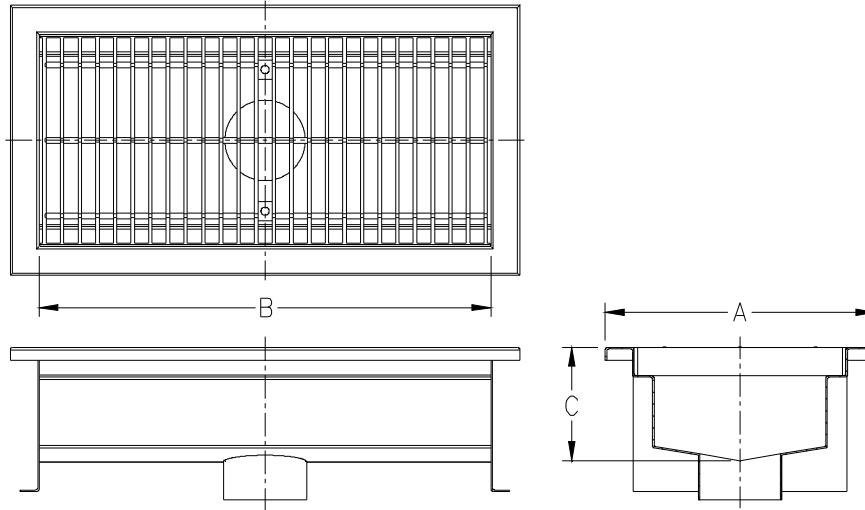

Size	Dimensions in Inches [mm]			No. of Grates
	A	B	C	
12	14.3 [363]	24 [610]	4 [102]	1
12	14.3 [363]	48 [1219]	4 [102]	2
12	14.3 [363]	72 [1829]	4 [102]	3
12	14.3 [363]	120 [3048]	4 [102]	5
18	20.3 [516]	24 [610]	4 [102]	1
18	20.3 [516]	48 [1219]	4 [102]	2
18	20.3 [516]	72 [1829]	4 [102]	3
18	20.3 [516]	120 [3048]	4 [102]	5
24	26.6 [676]	24 [610]	4 [102]	1
24	26.6 [676]	48 [1219]	4 [102]	2
24	26.6 [676]	72 [1829]	4 [102]	3
24	26.6 [676]	120 [3048]	4 [102]	5

ENGINEERING SPECIFICATION: Zurn Z893

Channels are made of #14 ga. fabricated Stainless Steel conforming to ASTM A-240 (type 304). Channels weigh less than 4.15 lbs.[1.05kg] per linear foot, have a smooth, 1.5" [38mm] radiused self cleaning bottom with a Manning's coefficient of .009. Channels have feet for patty pour or leveling studs standard to secure trench in its final location with 4" [102mm] No-Hub bottom outlet. All welds must be performed by a certified welder per ASTM standard AWS D1.6. Channels to be produced in the U.S.A.

**Standard size units are shown, special sizes are available upon request.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Type 304 Stainless Steel*

SUFFIXES

- ___ -DB Bottom Drop in Bucket
- ___ -GG Fiberglass Grate - Class A
- ___ -GL Grate Lockdown Assembly
- ___ -RFS Reinforced Stainless Steel Slotted Grate - Class A (Sizes 18 & 24 Only)
- ___ -RPS Reinforced Stainless Steel Perforated Grate- Class A (Sizes 18 & 24 Only)
- ___ -RFSC Reinforced Stainless Steel Slotted Grate - Class C (Size 12 Only)
- ___ -RPSC Reinforced Stainless Steel Perforated Grate- Class C (Size 12 Only)
- ___ -SBG-L Bar Grate - Class C (Size 12 Only)
- ___ -SBG Bar Grate - Class A (Sizes 18 & 24 Only)

* Regularly furnished unless otherwise specified.