




Z-898 18" WIDE TRENCH DRAIN SYSTEM

Dimensions Subject to Manufacturing Tolerances

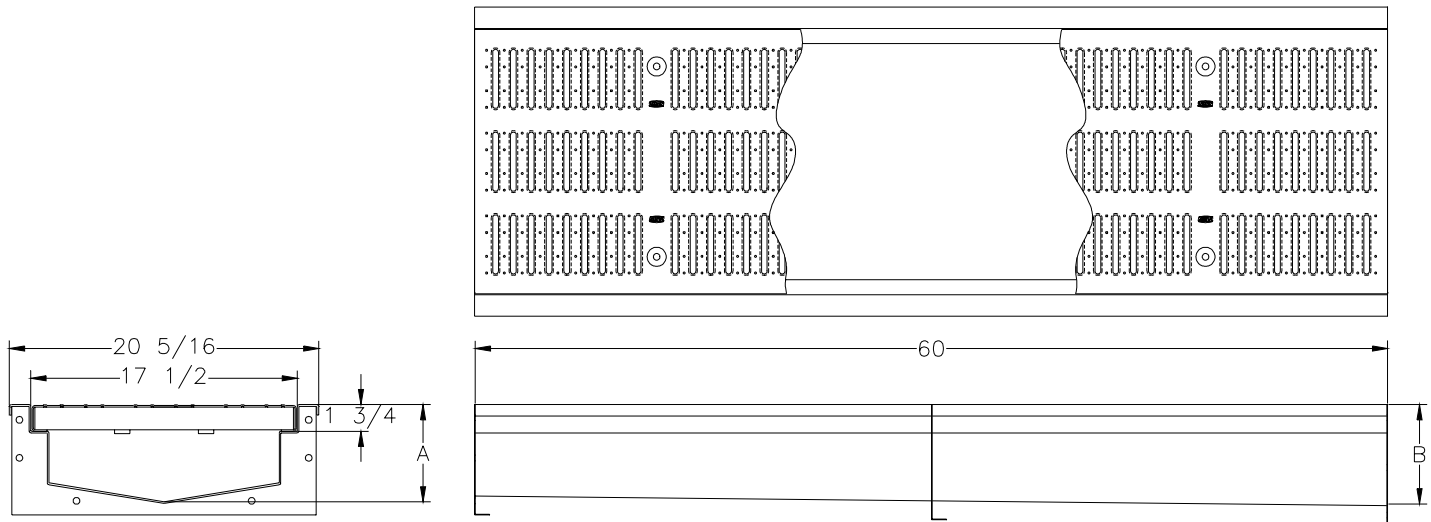

| Channel Number | Overall Depth | | Max. Flow Rate (GPM) | Approx. Wt. Lbs. (Less Grates) |
|----------------|---------------|--------|----------------------|--------------------------------|
| | A Min. | B Max. | | |
| 89801 | 6.00 | 6.63 | 640 | 60 |
| 89802 | 6.63 | 7.25 | 805 | 62 |
| 89802N | 7.25 | 7.25 | --- | 64 |
| 89803 | 7.25 | 7.88 | 982 | 65 |
| 89804 | 7.88 | 8.50 | 1167 | 67 |
| 89804N | 8.50 | 8.50 | --- | 68 |
| 89805 | 8.50 | 9.13 | 1361 | 69 |
| 89806 | 9.13 | 9.75 | 1562 | 72 |
| 89806N | 9.75 | 9.75 | --- | 73 |
| 89807 | 9.75 | 10.38 | 1769 | 74 |
| 89808 | 10.38 | 11.00 | 1982 | 76 |
| 89808N | 11.00 | 11.00 | --- | 77 |
| 89809 | 11.00 | 11.63 | 2200 | 78 |
| 89810 | 11.63 | 12.25 | 2423 | 81 |
| 89810N | 12.25 | 12.25 | --- | 82 |
| 89811 | 12.25 | 12.88 | 2651 | 83 |
| 89812 | 12.88 | 13.50 | 2882 | 85 |
| 89812N | 13.50 | 13.50 | --- | 86 |
| 89813 | 13.50 | 14.13 | 3117 | 88 |
| 89814 | 14.13 | 14.75 | 3356 | 90 |
| 89814N | 14.75 | 14.75 | --- | 91 |
| 89815 | 14.75 | 15.38 | 3597 | 92 |
| 89816 | 15.38 | 16.00 | 3842 | 95 |
| 89816N | 16.00 | 16.00 | --- | 96 |
| 89817 | 16.00 | 16.63 | 4089 | 97 |
| 89818 | 16.63 | 17.25 | 4338 | 99 |
| 89818N | 17.25 | 17.25 | --- | 100 |
| 89819 | 17.25 | 17.88 | 4590 | 102 |
| 89820 | 17.88 | 18.50 | 4844 | 104 |

ENGINEERING SPECIFICATION Zurn Z-898 18" Wide Pre-Sloped Trench Drainage System with 1/8" per foot slope. #12 Gage Type 304 Stainless Steel drain channel with bolted flanged connection complete with rubber flange gasket, and stamped stainless steel grate.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ **Z-** #12 Gage Type 304 Stainless Steel Trench with Stamped Stainless Steel Grate.*

SUFFIXES

- ___ **-DB** Dome Bottom Strainer
- ___ **-E1** Closed End Cap
- ___ **-E3** 3" No-Hub End Outlet
- ___ **-E4** 4" No-Hub End Outlet
- ___ **-E6** 6" No-Hub End Outlet
- ___ **-E8** 8" No Hub End Outlet
- ___ **-FS** Fabricated Stainless Steel Slotted Grate
- ___ **-GG** Fiberglass Grate
- ___ **-GL** Grate Lockdown Assembly
- ___ **-K** Anchor Flange
- ___ **-KC** Clamp Collar and Pan
- ___ **-PS** Perforated Stainless Steel Grate
- ___ **-RFS** Reinforced Stainless Steel Slotted Grate
- ___ **-RPS** Reinforced Stainless Steel Perforated Grate
- ___ **-SBG** Stainless Steel Bar Grate
- ___ **-U2** 2" No-Hub Bottom Outlet
- ___ **-U3** 3" No-Hub Bottom Outlet
- ___ **-U4** 4" No-Hub Bottom Outlet
- ___ **-U6** 6" No-Hub Bottom Outlet
- ___ **-U8** 8" No Hub Bottom Outlet
- ___ **-VP** Vandal-Proof Secured Grate/Cover

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

| | | |
|-----------------------|--------------------------|-----------------------|
| REV. _____ | DATE: <u>7/6/00</u> | C.N. NO. <u>85139</u> |
| DWG. NO. <u>64052</u> | PRODUCT NO. <u>Z-898</u> | |