




# ZS880

## STAINLESS STEEL LINEAR SHOWER DRAIN GRATE OPTIONS

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

All ZS880 Grates are ADA compliant and are classified as light-duty per ASME Standard A112.6.3 and meet heel-proof requirements of maximum 5/16 [8] openings.

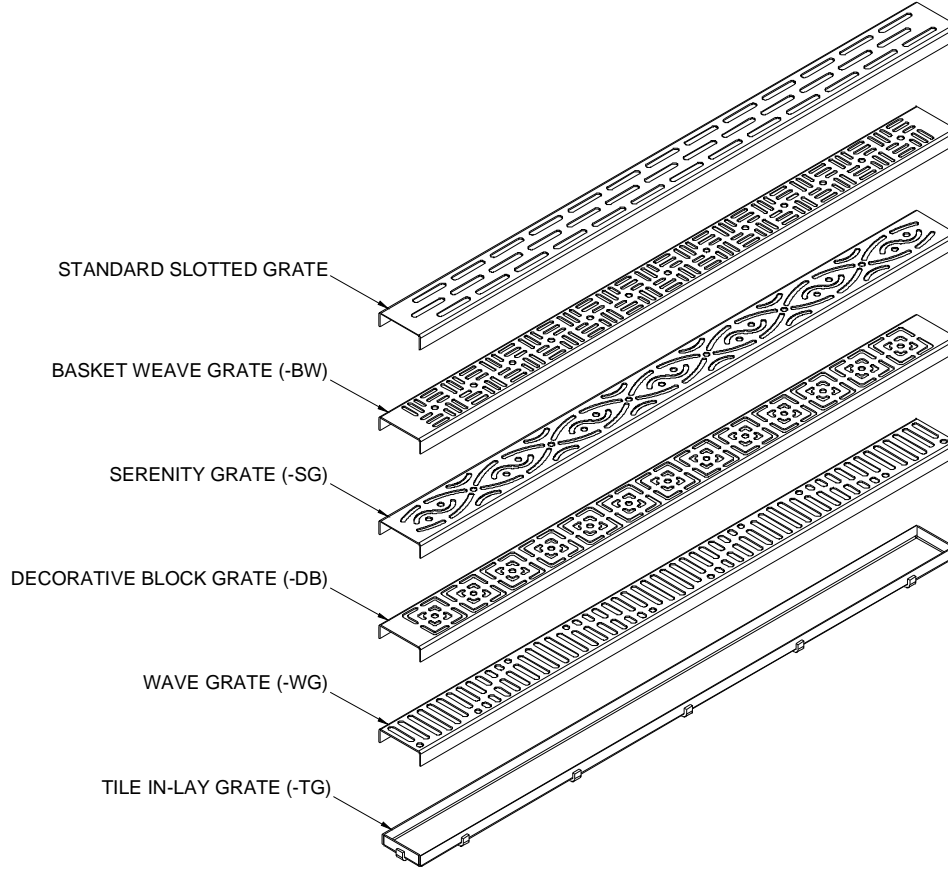

Drain Size Designation	Length In. (mm)	Open Area - Sq. In [cm <sup>2</sup> ]					
		Std. Slotted	Basket Weave (-BW)	Serenity (-SG)	Decorative Block (-DB)	Wave Grate (-WG)	Tile In-Lay (-TG)
-12	11-5/8 [295]	5.9 [38]	6.6 [43]	6.2 [40]	6.2 [40]	8.4 [54]	3.6 [23]
-28	27-5/8 [702]	15.3 [99]	17.0 [110]	15.6 [101]	16.1 [104]	20.2 [130]	8.0 [52]
-32	31-5/8 [803]	17.7 [114]	19.7 [127]	18.1 [117]	18.7 [121]	23.0 [148]	9.1 [59]
-36	35-5/8 [905]	20.0 [129]	22.3 [144]	20.3 [131]	21.2 [137]	26.0 [168]	10.2 [66]
-40	39-5/8 [1006]	22.4 [145]	24.9 [161]	22.8 [147]	23.7 [153]	29.0 [187]	11.3 [73]
-48	47-5/8 [1210]	27.1 [175]	30.2 [195]	27.5 [177]	28.6 [185]	34.8 [225]	13.4 [86]
-60	59-5/8 [1514]	34.2 [221]	38.0 [245]	34.5 [223]	31.1 [201]	43.6 [281]	16.6 [107]

Supplied By:



**877-903-7246**

[www.trenchdrainsupply.com](http://www.trenchdrainsupply.com)