

**R-1640 Series
Manhole Frame, Solid Lid**


Heavy Duty

U.S. GOVERNMENT Standard Designs.
Standard for underground electric or
telephone construction.

Available with drop handles or open
pickholes – please specify.

Security Bolting available, see **R-1750** series.

Furnished with machined horizontal and vertical bearing surfaces
(except R-1640-D, machined horizontal only).

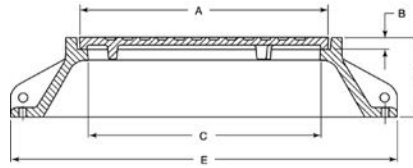

Illustrating R-1640-C

Dimensions in inches

Catalog No.	A	B	C	E	F	Anchor Bolt Circle *	Grate Alt.
R-1640-A	26	1 3/8	24	43	10		R-2300
R-1640-B	29	1 3/8	27	46	10	43-1/2	R-2290
R-1640-B1	29	1 3/8	27	46	5 5/8	43-1/2	R-2290-A
R-1640-C	32	1 3/8	30	49	10	43-1/2	
R-1640-C1	32	1 3/8	30	49	5 5/8	43-1/2	
R-1640-C1S	32	1 3/8	30	46	5 5/8	43-1/2	R-2750
R-1640-CS	32	1 3/8	30	46	10	43-1/2	R-2255
R-1640-D	38	1 1/2	36	49	10	46	R-2580


*Four 1" diameter anchor holes

**R-1642
Manhole Frame, Solid Lid**

Heavy Duty

Non-Rocking feature available, see p. 12.
Furnished with four 1" anchor holes on 33"
diameter bolt circle.

If a 4-inch height frame is required, order as **R-1642-D**.

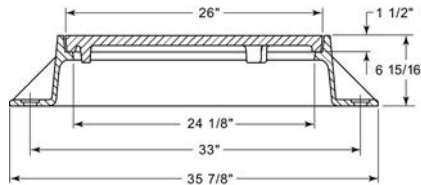

Available Grate: **R-2501**

**R-1642-A
Manhole Frame, Solid Lid**

Heavy Duty

Furnished with four 3/4" anchor holes on 31"
diameter bolt circle.

Specify flange-up for slab-type application
with ground bearing surfaces.

